


SAM 021338**HUAWIN Type EG 1260**

Groupe	Rectifieuse de rainures externes
Fabricant	HUAWIN
Type	EG 1260
Video youtube	https://youtu.be/ATw5twUp5Xw



Diamètre de la rainure min.	20 mm
Diamètre de la rainure max.	120 mm
Largeur de la rainure min.	4 mm
Largeur de la rainure max.	20 mm
Nombre de rainures	1 - 99
Courses:	
Axe X	70 mm
Axe Y	150 mm
Axe Z	600 mm
Axe-U	40 mm
Moteur de la broche	8 kW
Vitesse de broche max.	10000 t/min
Couple maximum	500 Nm
Branchement à l'air comprimé	5 bar
Puissance totale installée	20 kVA
Poids de la machine env.	4500 kg
Encombrement machine:	
Longueur	2200 mm
Largeur	1650 mm
Hauteur	2000 mm

www.mullermachines.ch

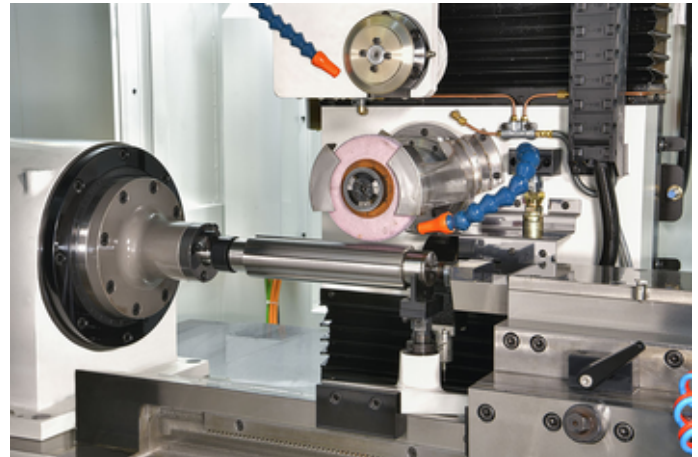

HUAWIN PRECISION LTD.

External Spine Grinder

EG1260

HUAWIN PRECISION LTD.

External Spine Grinder

EG1260

External Spine Grinder EG1260

- Equipped with hydraulic HMT for up-graded performance and user-friendly operations.
- Quick dressing process realized by moveable rotary dressing device
- DO motor of C-axis with zero-backspace latch.
- High precision applied to detect workpiece automatically


option

option

HWA

EG1260 External Spine Grinder

Machine Specification		Spindle	Spindle	Spindle
1	Spindle motor diameter	80mm	mm	mm
1	Spindle motor speed	1500	mm	mm
1	Maximum motor diameter	1200	mm	mm
1	Spindle width	200	mm	mm
1	Number of spindles	1-126	mm	mm
2	A-axis	150	mm	mm
2	B-axis	1500	mm	mm
2	C-axis	400	mm	mm
2	D-axis	400	mm	mm
2	E-axis	400	mm	mm
2	F-axis	400	mm	mm
2	G-axis	400	mm	mm
2	H-axis	400	mm	mm
2	I-axis	400	mm	mm
2	J-axis	400	mm	mm
2	K-axis	400	mm	mm
2	L-axis	400	mm	mm
2	M-axis	400	mm	mm
2	N-axis	400	mm	mm
2	O-axis	400	mm	mm
2	P-axis	400	mm	mm
2	Q-axis	400	mm	mm
2	R-axis	400	mm	mm
2	S-axis	400	mm	mm
2	T-axis	400	mm	mm
2	U-axis	400	mm	mm
2	V-axis	400	mm	mm
2	W-axis	400	mm	mm
2	X-axis	400	mm	mm
2	Y-axis	400	mm	mm
2	Z-axis	400	mm	mm
2	AA-axis	400	mm	mm
2	AB-axis	400	mm	mm
2	AC-axis	400	mm	mm
2	AD-axis	400	mm	mm
2	AE-axis	400	mm	mm
2	AF-axis	400	mm	mm
2	AG-axis	400	mm	mm
2	AH-axis	400	mm	mm
2	AI-axis	400	mm	mm
2	AJ-axis	400	mm	mm
2	AK-axis	400	mm	mm
2	AL-axis	400	mm	mm
2	AM-axis	400	mm	mm
2	AN-axis	400	mm	mm
2	AO-axis	400	mm	mm
2	AP-axis	400	mm	mm
2	AQ-axis	400	mm	mm
2	AR-axis	400	mm	mm
2	AS-axis	400	mm	mm
2	AT-axis	400	mm	mm
2	AU-axis	400	mm	mm
2	AV-axis	400	mm	mm
2	AW-axis	400	mm	mm
2	AX-axis	400	mm	mm
2	AY-axis	400	mm	mm
2	AZ-axis	400	mm	mm
2	BA-axis	400	mm	mm
2	BB-axis	400	mm	mm
2	BC-axis	400	mm	mm
2	BD-axis	400	mm	mm
2	BE-axis	400	mm	mm
2	BF-axis	400	mm	mm
2	BG-axis	400	mm	mm
2	BH-axis	400	mm	mm
2	BI-axis	400	mm	mm
2	BJ-axis	400	mm	mm
2	BK-axis	400	mm	mm
2	BL-axis	400	mm	mm
2	BM-axis	400	mm	mm
2	BN-axis	400	mm	mm
2	BO-axis	400	mm	mm
2	BP-axis	400	mm	mm
2	BQ-axis	400	mm	mm
2	BR-axis	400	mm	mm
2	BS-axis	400	mm	mm
2	BT-axis	400	mm	mm
2	BU-axis	400	mm	mm
2	BV-axis	400	mm	mm



B : S1-axis
C : C-axis
X : Feeding- axis
Y : Feeding-axis
Z : Feeding-axis
U : Rotary dressing device

www.mullermachines.ch

