


SAM 021338**HUAWIN Art EG 1260**

Gruppe Aussenverzahnungsschleifmaschine
Hersteller HUAWIN
Art EG 1260



Nutendurchmesser min.	20 mm
Nutendurchmesser max.	120 mm
Nutenbreite min.	4 mm
Nutenbreite max.	20 mm
Anzahl der Nuten	1 - 99
Verfahrwege:	
X-Achse	70 mm
Y-Achse	150 mm
Z-Achse	600 mm
U-Achse	40 mm
Spindelmotor	8 kW
Drehzahl max.	10000 t/min
Maximales Drehmoment	500 Nm
Anschluss an Druckluft	5 bar
Gesamtleistungsbedarf	20 kVA
Maschinengewicht ca.	4500 kg
Abmessungen Maschine:	
Länge	2200 mm
Breite	1650 mm
Höhe	2000 mm

www.mullermachines.ch

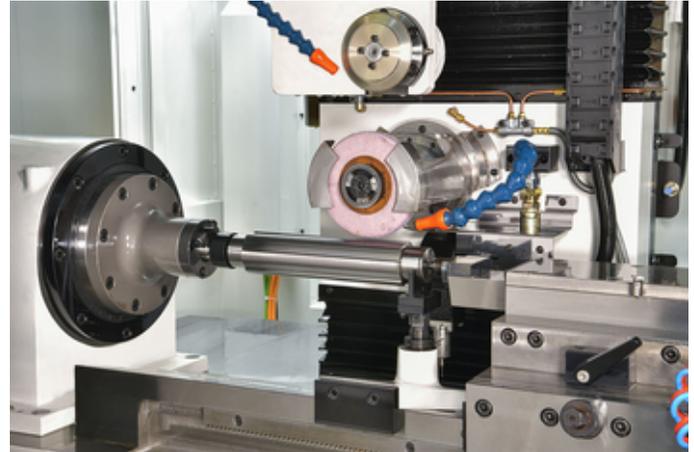

HUIAWIN PRECISION LTD.
External Spline Grinder **EG1260**

External Spline Grinder EG1260

- Equipped with interactive HM for upgraded performance and user-friendly operators.
- Quick dressing process realized by moveable rotary dressing device.
- DD motor of C-axis with zero-backspace last.
- High precision applied to detect workpiece automatically.







HUIAWIN PRECISION LTD.
External Spline Grinder **EG1260**


EG1260 External Spline Grinder

Machine Specifications		Value	Unit	Remark
General				
Min. spline minor diameter	40.00	mm		
Min. spline width	4	mm		
Max. spline major diameter	120	mm		
Max. spline width	20	mm		
Number of spline	1-99			
Grinder				
A-axis	575	mm		
B-axis	1100	mm		
C-axis	40	mm		
D-axis	2000	mm		
Y	Rated torque	1000	N.m	
	Rated distance	300	mm	
Z	Motor	7.5	kW	
	Max. speed	10000	rpm	
X	Motor	1.5	kW	
	Max. speed	1200	rpm	
U	Motor	30	kW	
	Pressure	0.5	MPa	
Y Floor Height	2000x1650x2000	mm		
Z Length	4000	mm		

B: S1-axis
 C: C-axis
 X: Feeding-axis
 Y: Feeding-axis
 Z: Feeding-axis
 U: Rotary dressing device



HUIAWIN PRECISION LTD.
 3113 維多利亞大道二樓02號
 Unit 02, No. 3113, Victoria Avenue, Second City, Taipei
 Tel: +886 2 2618 6100 Fax: +886 2 2618 6108
 No. 1000, Zhongxing Road, Taipei
 Tel: +886 2 2618 6100 Fax: +886 2 2618 6108
 Email: info@mullermachines.ch
 www.mullermachines.ch

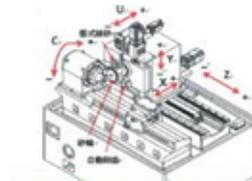B : S1-axis
 C : C-axis
 X : Feeding- axis
 Y : Feeding-axis
 Z : Feeding-axis
 U : Rotary dressing device

www.mullermachines.ch

