


SAM 021338**HUAWIN Art EG 1260**

Gruppe	Aussenverzahnungsschleifmaschine
Hersteller	HUAWIN
Art	EG 1260
Youtube video	https://youtu.be/ATw5twUp5Xw



Nutendurchmesser min.	20 mm
Nutendurchmesser max.	120 mm
Nutenbreite min.	4 mm
Nutenbreite max.	20 mm
Anzahl der Nuten	1 - 99
Verfahrwege:	
X-Achse	70 mm
Y-Achse	150 mm
Z-Achse	600 mm
U-Achse	40 mm
Spindelmotor	8 kW
Drehzahl max.	10000 t/min
Maximales Drehmoment	500 Nm
Anschluss an Druckluft	5 bar
Gesamtleistungsbedarf	20 kVA
Maschinengewicht ca.	4500 kg
Abmessungen Maschine:	
Länge	2200 mm
Breite	1650 mm
Höhe	2000 mm

A large industrial CNC lathe machine, model EG1260 HUAWIN, with a control panel and a protective enclosure. The machine is white and grey, with a large window showing the internal spindle and tool. It has a control panel on the left and a protective enclosure on the right. The machine is mounted on a black base with yellow leveling feet. A flexible duct is connected to the top of the machine.

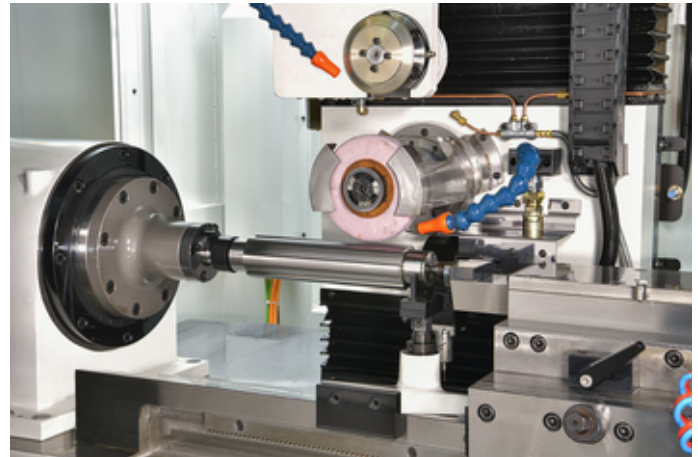

HUAWEI PRECISION LTD.

External Spine Grinder

EG1260

External Spine Grinder EG1260

- Equipped with Interactive HMI for upgraded performance and user friendly operations.
- Quick dressing process realized by moveable rotary dressing device
- DD motor of C-axis with zero-backspace lath.
- High precision applied to detect workpiece automatically






option



option



HUIWEN PRECISION LTD.			
External Spline Grinder			
EG1260 External spline grinder			
Machine Specifications			
Machine Identification	Specs	Unit	Remarks
Min.spline inner diameter	4000	mm	
Max.spline inner diameter	12000	mm	
Min.spline major diameter	4200	mm	
Min.spline width	200	mm	
Number of spline	1-100		
A-axis	250	mm	
B-axis	1500	mm	
C-axis	400	mm	
Z-axis	1000	mm	
C-axis (Z0 motor)	Rated torque 3000	mm	
	center distance	3000	mm
S/A-axis	Powerful	3.5	kw
	Power speed	1000	rpm
W	Power	10000	W
Max pressure	Rated flow	200	L/min
Min pressure	Pressure	0.5-5	MPa
Power input	220V/50HZ/1000W		
Feed strength	60000	N	
① T-01 axis ② C-axis ③ Z Feeding axis ④ Y Feeding axis ⑤ Z Feeding axis ⑥ Rotary Feeding Motor			



B : S1-axis
C : C-axis
X : Feeding- axis
Y : Feeding-axis
Z : Feeding-axis
U : Rotary dressing device

www.mullermachines.ch

