


SAM 021338**HUAWIN Type EG 1260**

Group External spline grinder
Manufacturer HUAWIN
Type EG 1260



Max. Spline major diameter	20 mm
Max. spline major diameter	120 mm
Spline width min.	4 mm
Spline width max.	20 mm
Number of spline	1 - 99
Travels:	
X axis	70 mm
Y axis	150 mm
Z axis	600 mm
U axis	40 mm
Spindle motor	8 kW
max. speed	10000 t/min
Torque max.	500 Nm
Air connect	5 bar
Total power required	20 kVA
Machine's weight about	4500 kg
Overall dimensions machine:	
Length	2200 mm
Width	1650 mm
Height	2000 mm

A large industrial CNC lathe machine, model EG1260 HUAWIN, with a control panel and a protective enclosure. The machine is white and black, with a large window showing the internal components. It has a control panel on the left side and a protective enclosure on the right. The machine is mounted on a black base with yellow leveling feet. A flexible duct is connected to the top of the machine.

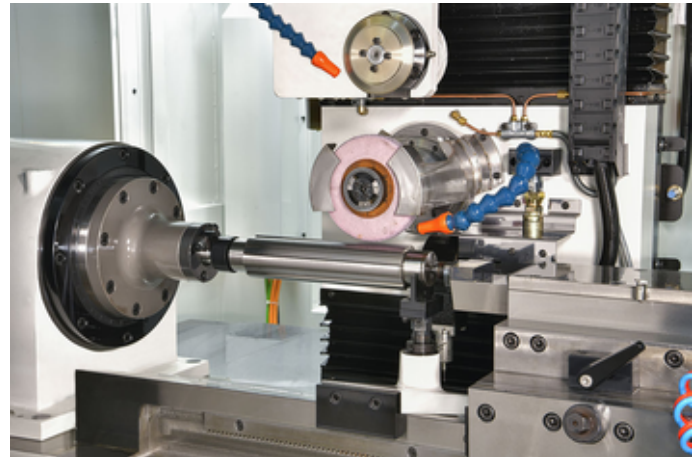

HUAWIN PRECISION LTD.

External Spine Grinder **EG1260**

External Spine Grinder **EG1260**

- Equipped with Interactive HM for up-graded performance and low grinding temperatures.
- Quick driving process realized by moveable rotary driving device
- DO motor of C-axis with zero-backspace lock.
- High precision applied to detect workpiece automatically






HUAWIN PRECISION LTD.

External Spine Grinder **EG1260**

EG1260 External Spine Grinder

Machine Specifications	Spindle	Table	Accessories
1. Min. spindle motor diameter	φ20	mm	
2. Max. spindle motor	1200	mm	
3. Min. spindle grinder diameter	1200	mm	
4. Min. spindle width	200	mm	
5. Number of spindle	12000		
Spindle			
6. A-axis	750	mm	
7. B-axis	1500	mm	
8. C-axis	400	mm	
9. D-axis	1000	mm	
10. (C-axis 200 motor)			
11. Max. spindle torque	5000	mm	
12. Max. spindle center distance	5000	mm	
13. S1-axis	Proseal	7.5	mm
14. S2-axis	Proseal	100000	mm
15. Pressure	1200	mm	
16. Air pressure	0.5	mm	
17. Pressure	0.5	mm	
18. Motor weight	22000mm/10000mm	mm	
19. Best weight	40000	mm	







1. S1-axis
 2. S2-axis
 3. Grinding axis
 4. Grinding axis
 5. Grinding axis
 6. Grinding axis
 7. Grinding axis
 8. Grinding axis



HWA
PRECISION

313 振華精密五金有限公司 2010 年 10 月 10 日
 313 振華精密五金有限公司 2010 年 10 月 10 日
 No. 313 振華精密五金有限公司 2010 年 10 月 10 日
 No. 313 振華精密五金有限公司 2010 年 10 月 10 日
 No. 313 振華精密五金有限公司 2010 年 10 月 10 日
 No. 313 振華精密五金有限公司 2010 年 10 月 10 日



B : S1-axis
C : C-axis
X : Feeding- axis
Y : Feeding-axis
Z : Feeding-axis
U : Rotary dressing device

www.mullermachines.ch

