


SAM 021338**HUAWIN Type EG 1260**

Group	External spline grinder
Manufacturer	HUAWIN
Type	EG 1260
Youtube video	https://youtu.be/ATw5twUp5Xw



Max. Spline major diameter	20 mm
Max. spline major diameter	120 mm
Spline width min.	4 mm
Spline width max.	20 mm
Number of spline	1 - 99
Travels:	
X axis	70 mm
Y axis	150 mm
Z axis	600 mm
U axis	40 mm
Spindle motor	8 kW
max. speed	10000 t/min
Torque max.	500 Nm
Air connect	5 bar
Total power required	20 kVA
Machine's weight about	4500 kg
Overall dimensions machine:	
Length	2200 mm
Width	1650 mm
Height	2000 mm

A large industrial CNC lathe machine, model EG1260 HUAWIN, with a control panel and a protective enclosure. The machine is white and black, with a large window showing the internal components. It has a control panel on the left side and a protective enclosure on the right. The machine is mounted on a black base with yellow leveling feet. A flexible duct is connected to the top of the machine.

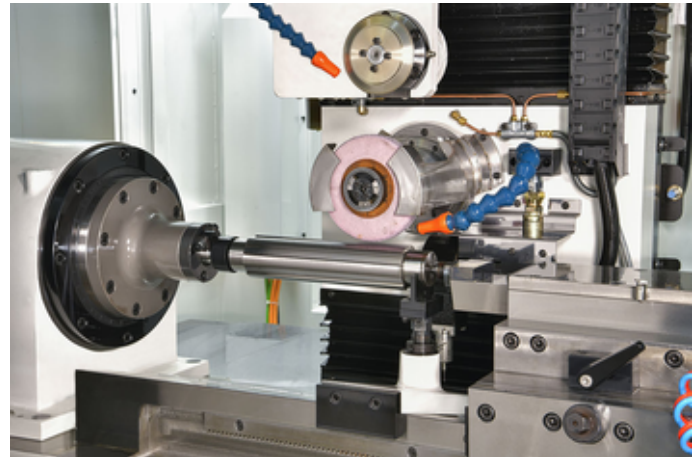

HUAWIN PRECISION LTD.

External Spine Grinder

EG1260

HUAWIN PRECISION LTD.

External Spine Grinder

EG1260

External Spine Grinder EG1260


- Equipped with Interactive HM for up-graded performance and low grinding temperatures.
- Quick dressing process realized by moveable rotary dressing device
- DO motor of C-axis with zero-backspace lock.
- High precision applied to detect workpiece automatically

option

option

EG1260 External Spine Grinder

Machine Specifications		Spindle	Table	Feedstock
1	Min. spindle motor diameter	400	mm	
2	Max. spindle motor	1200	mm	
3	Min. spindle motor diameter	1200	mm	
4	Min. spindle motor	200	mm	
5	Max. spindle motor	1200	mm	
Number of spindle		2		
6	A-axis	750	mm	
7	B-axis	1400	mm	
8	C-axis	400	mm	
9	D-axis	1000	mm	
10	(C-axis 200 motor)			
11	Max. spindle motor diameter	1200	mm	
12	(C-axis 200 motor)			
13	Max. spindle motor	1200	mm	
14	Max. spindle motor	1200	mm	
15	Max. spindle motor	1200	mm	
16	Max. spindle motor	1200	mm	
17	Max. spindle motor	1200	mm	
18	Max. spindle motor	1200	mm	
19	Max. spindle motor	1200	mm	
20	Max. spindle motor	1200	mm	
21	Max. spindle motor	1200	mm	
22	Max. spindle motor	1200	mm	
23	Max. spindle motor	1200	mm	
24	Max. spindle motor	1200	mm	
25	Max. spindle motor	1200	mm	
26	Max. spindle motor	1200	mm	
27	Max. spindle motor	1200	mm	
28	Max. spindle motor	1200	mm	
29	Max. spindle motor	1200	mm	
30	Max. spindle motor	1200	mm	
31	Max. spindle motor	1200	mm	
32	Max. spindle motor	1200	mm	
33	Max. spindle motor	1200	mm	
34	Max. spindle motor	1200	mm	
35	Max. spindle motor	1200	mm	
36	Max. spindle motor	1200	mm	
37	Max. spindle motor	1200	mm	
38	Max. spindle motor	1200	mm	
39	Max. spindle motor	1200	mm	
40	Max. spindle motor	1200	mm	
41	Max. spindle motor	1200	mm	
42	Max. spindle motor	1200	mm	
43	Max. spindle motor	1200	mm	
44	Max. spindle motor	1200	mm	
45	Max. spindle motor	1200	mm	
46	Max. spindle motor	1200	mm	
47	Max. spindle motor	1200	mm	
48	Max. spindle motor	1200	mm	
49	Max. spindle motor	1200	mm	
50	Max. spindle motor	1200	mm	
51	Max. spindle motor	1200	mm	
52	Max. spindle motor	1200	mm	
53	Max. spindle motor	1200	mm	
54	Max. spindle motor	1200	mm	
55	Max. spindle motor	1200	mm	
56	Max. spindle motor	1200	mm	
57	Max. spindle motor	1200	mm	
58	Max. spindle motor	1200	mm	
59	Max. spindle motor	1200	mm	
60	Max. spindle motor	1200	mm	
61	Max. spindle motor	1200	mm	
62	Max. spindle motor	1200	mm	
63	Max. spindle motor	1200	mm	
64	Max. spindle motor	1200	mm	
65	Max. spindle motor	1200	mm	
66	Max. spindle motor	1200	mm	
67	Max. spindle motor	1200	mm	
68	Max. spindle motor	1200	mm	
69	Max. spindle motor	1200	mm	
70	Max. spindle motor	1200	mm	
71	Max. spindle motor	1200	mm	
72	Max. spindle motor	1200	mm	
73	Max. spindle motor	1200	mm	
74	Max. spindle motor	1200	mm	
75	Max. spindle motor	1200	mm	
76	Max. spindle motor	1200	mm	
77	Max. spindle motor	1200	mm	
78	Max. spindle motor	1200</		



B : S1-axis
C : C-axis
X : Feeding- axis
Y : Feeding-axis
Z : Feeding-axis
U : Rotary dressing device

www.mullermachines.ch

