


SAM 021338**HUAWIN Type EG 1260**

Group	External spline grinder
Manufacturer	HUAWIN
Type	EG 1260
Youtube video	https://youtu.be/ATw5twUp5Xw



Max. Spline major diameter	20 mm
Max. spline major diameter	120 mm
Spline width min.	4 mm
Spline width max.	20 mm
Number of spline	1 - 99
Travels:	
X axis	70 mm
Y axis	150 mm
Z axis	600 mm
U axis	40 mm
Spindle motor	8 kW
max. speed	10000 t/min
Torque max.	500 Nm
Air connect	5 bar
Total power required	20 kVA
Machine's weight about	4500 kg
Overall dimensions machine:	
Length	2200 mm
Width	1650 mm
Height	2000 mm

www.mullermachines.ch

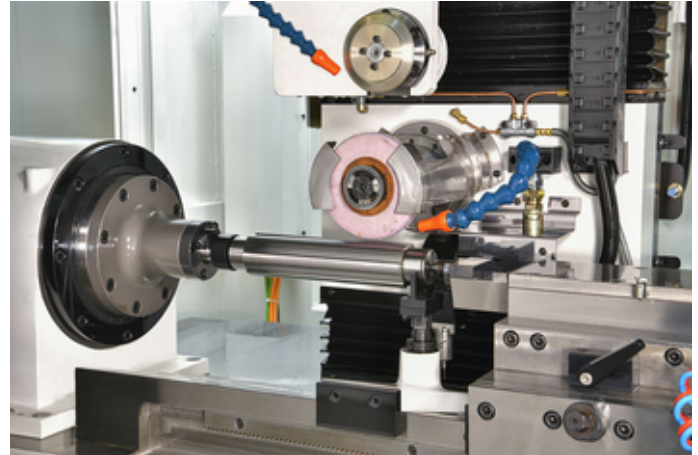

HUIAWIN PRECISION LTD.
External Spline Grinder **EG1260**

External Spline Grinder EG1260

- Equipped with interactive HM for upgraded performance and user-friendly operators.
- Quick dressing process realized by moveable rotary dressing device.
- DD motor of C-axis with zero-backspace last.
- High precision applied to detect workpiece automatically.








HUIAWIN PRECISION LTD.
External Spline Grinder **EG1260**

EG1260 External Spline Grinder

Machine Specifications		Value	Unit	Remark
Grinder				
Min. spline minor diameter	40.00	mm		
Min. spline width	4	mm		
Max. spline major diameter	120	mm		
Max. spline width	20	mm		
Number of spline	1-99			
Turntable				
C-axis	120	mm		
D-axis	1100	mm		
E-axis	40	mm		
F-axis	2000	mm		
Y	Rated torque	1000	N.m	
	Center distance	300	mm	
S	Motor	7.5	kW	
	Max. speed	10000	rpm	
S	Min. speed	120	rpm	
	Max. speed	10000	rpm	
S	Max. torque	100	N.m	
	Min. torque	0.5	N.m	
Y	Flange diameter	200mm/160mm/200mm	mm	
	Flange thickness	40/50	mm	

B: S1-axis
 C: C-axis
 X: Feeding-axis
 Y: Feeding-axis
 Z: Feeding-axis
 U: Rotary dressing device

HUIAWIN PRECISION LTD.
 3113 維多利亞大道二樓加樓
 Unit 2, No. 3113 Victoria Avenue 2/F, Tseung Kwan O, New Territories
 Tel: +852 2361 8518 Fax: +852 2361 8718
 Web: www.mullermachines.ch Email: sales@mullermachines.ch
 www.mullerprecision.com

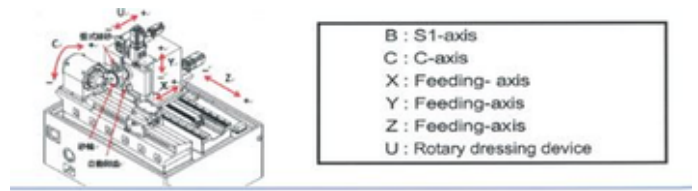www.mullermachines.ch

