


SAM 021338**HUAWIN Type EG 1260**

Group	External spline grinder
Manufacturer	HUAWIN
Type	EG 1260
Youtube video	https://youtu.be/ATw5twUp5Xw



Max. Spline major diameter	20 mm
Max. spline major diameter	120 mm
Spline width min.	4 mm
Spline width max.	20 mm
Number of spline	1 - 99
Travels:	
X axis	70 mm
Y axis	150 mm
Z axis	600 mm
U axis	40 mm
Spindle motor	8 kW
max. speed	10000 t/min
Torque max.	500 Nm
Air connect	5 bar
Total power required	20 kVA
Machine's weight about	4500 kg
Overall dimensions machine:	
Length	2200 mm
Width	1650 mm
Height	2000 mm

A large industrial CNC lathe machine, model EG1260 HUAWIN, with a control panel and a protective enclosure. The machine is white and black, with a large window showing the internal tool and workpiece. It has a control panel on the left and a protective enclosure on the right. The machine is mounted on a black base with yellow leveling feet. A green emergency stop button is visible on the base. The machine is labeled "EG1260 HUAWIN" on the front. A control panel with a screen and buttons is on the left. A protective enclosure with a window is on the right. The machine is mounted on a black base with yellow leveling feet. A green emergency stop button is visible on the base. The machine is labeled "EG1260 HUAWIN" on the front. A control panel with a screen and buttons is on the left. A protective enclosure with a window is on the right. The machine is mounted on a black base with yellow leveling feet. A green emergency stop button is visible on the base. The machine is labeled "EG1260 HUAWIN" on the front.

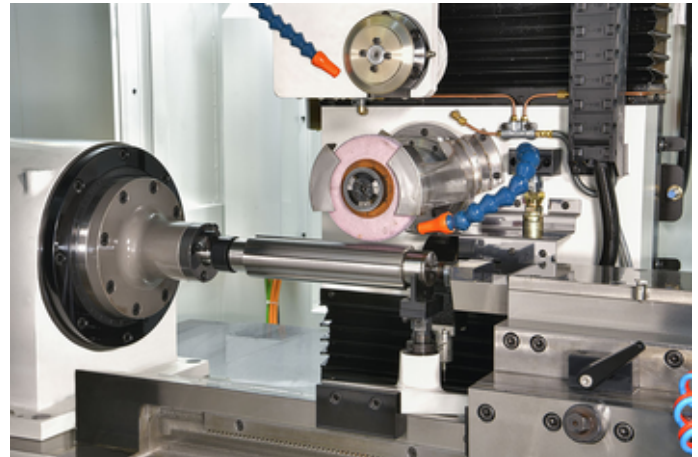

HUAWIN PRECISION LTD.

External Spine Grinder

EG1260

HUAWIN PRECISION LTD.

External Spine Grinder

EG1260

External Spine Grinder EG1260

- Equipped with hydraulic HMT for up-graded performance and user-friendly operations.
- Quick dressing process realized by moveable rotary dressing device
- DO motor of C-axis with zero-backspace latch.
- High precision applied to detect workpiece automatically


option

option

www.hwa.com.tw

EG1260 External Spine Grinder

Machine Specifications		Spindle	Spindle	Spindle
1	Spindle motor diameter	80mm	mm	mm
1	Spindle motor power	15kW	mm	mm
1	Maximum major diameter	1200	mm	mm
1	Maximum spindle	200	mm	mm
1	Maximum of spindle	1-100	mm	mm
2	C-axis			
2	4-axis	100	mm	mm
2	5-axis	1500	mm	mm
2	6-axis	400	mm	mm
2	7-axis	1000	mm	mm
2	8-axis	1000	mm	mm
2	C-axis (DO motor)	rotated locked	1000	mm
2	9-axis	rotated locked	1000	mm
2	10-axis	rotated locked	1000	mm
2	11-axis	rotated locked	1000	mm
2	12-axis	rotated locked	1000	mm
2	13-axis	rotated locked	1000	mm
2	14-axis	rotated locked	1000	mm
2	15-axis	rotated locked	1000	mm
2	16-axis	rotated locked	1000	mm
2	17-axis	rotated locked	1000	mm
2	18-axis	rotated locked	1000	mm
2	19-axis	rotated locked	1000	mm
2	20-axis	rotated locked	1000	mm
2	21-axis	rotated locked	1000	mm
2	22-axis	rotated locked	1000	mm
2	23-axis	rotated locked	1000	mm
2	24-axis	rotated locked	1000	mm
2	25-axis	rotated locked	1000	mm
2	26-axis	rotated locked	1000	mm
2	27-axis	rotated locked	1000	mm
2	28-axis	rotated locked	1000	mm
2	29-axis	rotated locked	1000	mm
2	30-axis	rotated locked	1000	mm
2	31-axis	rotated locked	1000	mm
2	32-axis	rotated locked	1000	mm
2	33-axis	rotated locked	1000	mm
2	34-axis	rotated locked	1000	mm
2	35-axis	rotated locked	1000	mm
2	36-axis	rotated locked	1000	mm
2	37-axis	rotated locked	1000	mm
2	38-axis	rotated locked	1000	mm
2	39-axis	rotated locked	1000	mm
2	40-axis	rotated locked	1000	mm
2	41-axis	rotated locked	1000	mm
2	42-axis	rotated locked	1000	mm
2	43-axis	rotated locked	1000	mm
2	44-axis	rotated locked	1000	mm
2	45-axis	rotated locked	1000	mm
2	46-axis	rotated locked	1000	mm
2	47-axis	rotated locked	1000	mm
2	48-axis	rotated locked	1000	mm
2	49-axis	rotated locked	1000	mm
2	50-axis	rotated locked	1000	mm
2	51-axis	rotated locked	1000	mm
2	52-axis	rotated locked	1000	mm
2	53-axis	rotated locked	1000	mm
2	54-axis	rotated locked	1000	mm
2	55-axis	rotated locked	1000	mm
2	56-axis	rotated locked	1000	mm
2	57-axis	rotated locked	1000	mm
2	58-axis	rotated locked	1000	mm
2	59-axis	rotated locked	1000	mm
2	60-axis	rotated locked	1000	mm
2	61-axis	rotated locked	1000	mm
2	62-axis	rotated locked	1000	mm
2	63-axis	rotated locked	1000	mm
2	64-axis	rotated locked	1000	mm
2	65-axis	rotated locked	1000	mm
2	66-axis	rotated locked	1000	mm
2	67-axis	rotated locked	1000	mm
2	68-axis	rotated locked	1000	mm
2	69-axis	rotated locked	100	



B : S1-axis
C : C-axis
X : Feeding- axis
Y : Feeding-axis
Z : Feeding-axis
U : Rotary dressing device

www.mullermachines.ch

