


**SAM 021727****EWAG Type RS 15**

**Group** Tool and cutter grinder  
**Manufacturer** EWAG  
**Type** RS 15



|                                   |               |
|-----------------------------------|---------------|
| Table length                      | 155 mm        |
| Table width                       | 205 mm        |
| X axis                            | 490 mm        |
| Y axis                            | 130 mm        |
| Spindle inclination (A-axis)      | -10 / +27 °   |
| B axis swivelling range           | 260 °         |
| Oscillation size                  | 0 - 70 mm     |
| Oscillation                       | 30 / 60 min-1 |
| Grinding spindle speeds:          |               |
| stepless                          |               |
| from                              | 1000 t/min    |
| up to                             | 8000 t/min    |
| Workpiece carriage:               |               |
| Radius adjustment (Z-axis)        | 0 - 115 mm    |
| Adjustment accuracy of the Z axis | mm            |
| Cross table clamping surface      | 155 x 205 mm  |
| Courses support                   | 60 mm         |
| Pneumatic swivel lock             | 40 Nm         |
| Contact pressure variable         | 0 - 400 N     |
| Voltage 50 Hz 3x                  | 400 Volt      |
| Grinding spindle motor            | 2.2 kW        |
| Total power required              | 5 kVA         |
| Machine's weight about            | 1800 kg       |
| Overall dimensions machine:       |               |
| Length                            | 1630 mm       |
| Width                             | 1250 mm       |
| Height                            | 1900 mm       |
| Dimensions of the control:        |               |
| Length                            | 1000 mm       |
| Width                             | 400 mm        |
| Height                            | 960 mm        |
| <b>Various accessories:</b>       |               |
| Digital readout number of axis:   | 3             |
| Dividing attachment               | 2x            |
| Redressing device                 |               |
| Adjustable projector              |               |
| Cold light                        |               |
| Central lubrication               |               |



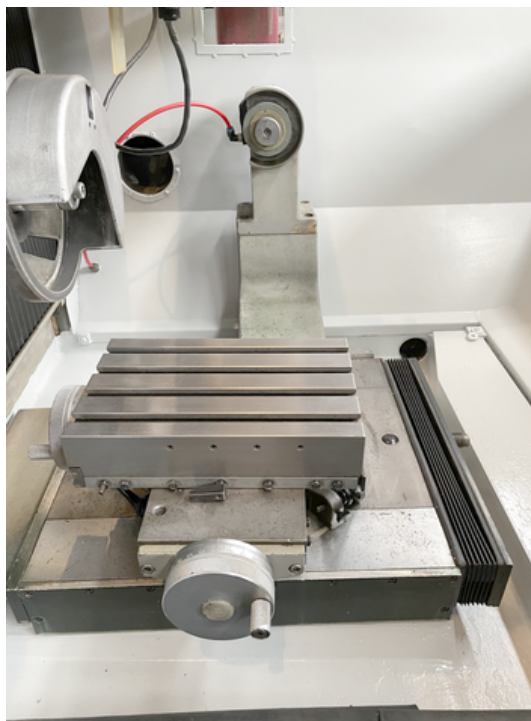

[www.mullermachines.ch](http://www.mullermachines.ch)

