


SAM 021338**HUAWIN Type EG 1260**

Groupe	Rectifieuse de rainures externes
Fabricant	HUAWIN
Type	EG 1260
Video youtube	https://youtu.be/ATw5twUp5Xw



Diamètre de la rainure min.	20 mm
Diamètre de la rainure max.	120 mm
Largeur de la rainure min.	4 mm
Largeur de la rainure max.	20 mm
Nombre de rainures	1 - 99
Courses:	
Axe X	70 mm
Axe Y	150 mm
Axe Z	600 mm
Axe-U	40 mm
Moteur de la broche	8 kW
Vitesse de broche max.	10000 t/min
Couple maximum	500 Nm
Branchement à l'air comprimé	5 bar
Puissance totale installée	20 kVA
Poids de la machine env.	4500 kg
Encombrement machine:	
Longueur	2200 mm
Largeur	1650 mm
Hauteur	2000 mm

A large industrial CNC lathe machine, model EG1260 HUAWIN, with a control panel and a protective enclosure. The machine is white and black, with a large window showing the internal components. It has a control panel on the left side and a protective enclosure on the right. The machine is mounted on a black base with yellow leveling feet. A flexible duct is connected to the top of the machine.

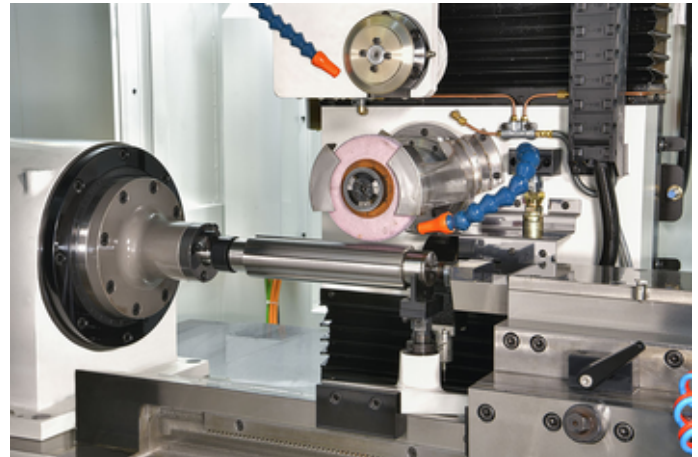

HUAWIN PRECISION LTD.

External Spline Grinder **EG1260**

External Spline Grinder **EG1260**

- Equipped with Interactive HM for up-graded performance and low friendly operations.
- Quick driving process realized by reversible rotary driving device
- DO motor of C-axis with zero-backspace lock.
- High precision applied to detect workpiece automatically








option



option




華宇精密有限公司
HUAWIN PRECISION LTD.

HUAWIN PRECISION LTD.

External Spline Grinder **EG1260**

EG1260 External Spline Grinder

Machine Specifications		Spindle	Table	Accessories
Main spindle motor diameter		4.00	mm	
Main spindle motor power		1.20	kw	
1	Main spindle motor diameter	120	mm	
Main spindle motor		20	mm	
Number of spindle		1100	mm	
Spindle				
1	A-axis	75	mm	
2	B-axis	140	mm	
3	C-axis	40	mm	
4	D-axis	1000	mm	
Max. torque (200 motor)		3000	mm	
1	Center distance	3000	mm	
2	Max. speed	7.5	mm	
3	Max. speed	10000	mm	
4	Max. speed	1000	mm	
5	Max. speed	1000	mm	
6	Max. speed	1000	mm	
7	Max. speed	1000	mm	
8	Max. speed	1000	mm	
9	Max. speed	1000	mm	
10	Max. speed	1000	mm	
11	Max. speed	1000	mm	
12	Max. speed	1000	mm	
13	Max. speed	1000	mm	
14	Max. speed	1000	mm	
15	Max. speed	1000	mm	
16	Max. speed	1000	mm	
17	Max. speed	1000	mm	
18	Max. speed	1000	mm	
19	Max. speed	1000	mm	
20	Max. speed	1000	mm	
21	Max. speed	1000	mm	
22	Max. speed	1000	mm	
23	Max. speed	1000	mm	
24	Max. speed	1000	mm	
25	Max. speed	1000	mm	
26	Max. speed	1000	mm	
27	Max. speed	1000	mm	
28	Max. speed	1000	mm	
29	Max. speed	1000	mm	
30	Max. speed	1000	mm	
31	Max. speed	1000	mm	
32	Max. speed	1000	mm	
33	Max. speed	1000	mm	
34	Max. speed	1000	mm	
35	Max. speed	1000	mm	
36	Max. speed	1000	mm	
37	Max. speed	1000	mm	
38	Max. speed	1000	mm	
39	Max. speed	1000	mm	
40	Max. speed	1000	mm	
41	Max. speed	1000	mm	
42	Max. speed	1000	mm	
43	Max. speed	1000	mm	
44	Max. speed	1000	mm	
45	Max. speed	1000	mm	
46	Max. speed	1000	mm	
47	Max. speed	1000	mm	
48	Max. speed	1000	mm	
49	Max. speed	1000	mm	
50	Max. speed	1000	mm	
51	Max. speed	1000	mm	
52	Max. speed	1000	mm	
53	Max. speed	1000	mm	
54	Max. speed	1000	mm	
55	Max. speed	1000	mm	
56	Max. speed	1000	mm	
57	Max. speed	1000	mm	
58	Max. speed	1000	mm	
59	Max. speed	1000	mm	
60	Max. speed	1000	mm	
61	Max. speed	1000	mm	
62	Max. speed	1000	mm	
63	Max. speed	1000	mm	
64	Max. speed	1000	mm	
65	Max. speed	1000	mm	



B : S1-axis
C : C-axis
X : Feeding- axis
Y : Feeding-axis
Z : Feeding-axis
U : Rotary dressing device

www.mullermachines.ch

