


SAM 021338**HUAWIN Type EG 1260**

Groupe	Rectifieuse de rainures externes
Fabricant	HUAWIN
Type	EG 1260
Video youtube	https://youtu.be/ATw5twUp5Xw



Diamètre de la rainure min.	20 mm
Diamètre de la rainure max.	120 mm
Largeur de la rainure min.	4 mm
Largeur de la rainure max.	20 mm
Nombre de rainures	1 - 99
Courses:	
Axe X	70 mm
Axe Y	150 mm
Axe Z	600 mm
Axe-U	40 mm
Moteur de la broche	8 kW
Vitesse de broche max.	10000 t/min
Couple maximum	500 Nm
Branchement à l'air comprimé	5 bar
Puissance totale installée	20 kVA
Poids de la machine env.	4500 kg
Encombrement machine:	
Longueur	2200 mm
Largeur	1650 mm
Hauteur	2000 mm

www.mullermachines.ch

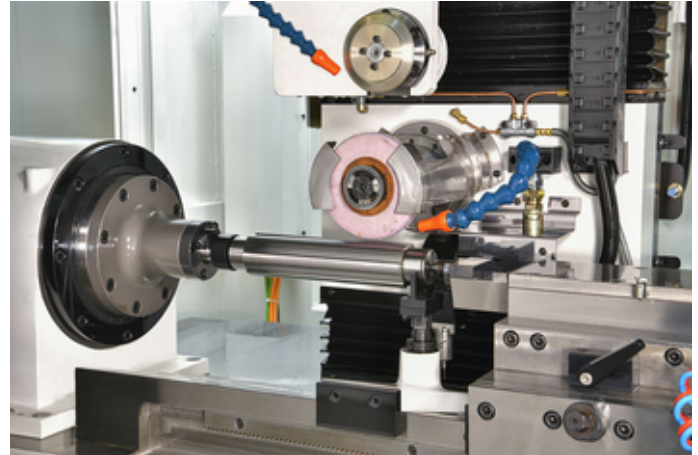

HUIAWIN PRECISION LTD.
External Spline Grinder **EG1260**

External Spline Grinder EG1260

- Equipped with interactive HM for upgraded performance and user-friendly operators.
- Quick dressing process realized by moveable rotary dressing device.
- DD motor of C-axis with zero-backspace last.
- High precision applied to detect workpiece automatically.



option option



HUIAWIN PRECISION LTD.
External Spline Grinder **EG1260**


EG1260 External Spline Grinder

Machine Specifications		Value	Unit	Remark
1	Min. spline minor diameter	40.00	mm	
2	Min. spline width	4	mm	
3	Max. spline major diameter	120	mm	
4	Max. spline width	20	mm	
5	Number of spline	1-99		
Grinder				
6	A-axis	575	mm	
7	B-axis	1100	mm	
8	C-axis	40	mm	
9	D-axis	2000	mm	
10	Max. torque	1000	N.m	
11	C-axis (DD motor)	center distance	300	mm
12	S11-axis	rotator	1.5	mm
13	S12-axis	max. speed	10000	rpm
14	S13-axis	rotator	1.5	mm
15	SP gearhead	rotator	30	mm
16	rotator	rotor	1.5	mm
17	Flange thickness	2000x1650x2000	mm	
18	Load capacity	4000	kg	

B: S1-axis
 C: C-axis
 X: Feeding-axis
 Y: Feeding-axis
 Z: Feeding-axis
 U: Rotary dressing device



311 德國卡爾斯魯厄大學路二號附樓
 4010 St. Gallen, Switzerland
 Tel: +41 71 310 4100 Fax: +41 71 310 4101
 Web: www.mullermachines.ch Email: sales@mullermachines.ch

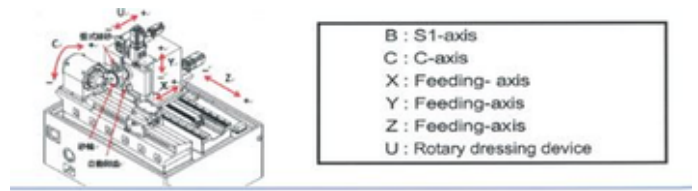www.mullermachines.ch

