

SAM 022819

UNIMAG Tipo PFA-40

Gruppo Lubrificazione
Produttori UNIMAG
Tipo PFA-40



Contenuto massima
Capacità
Larghezza del filtro in carta
Lunghezza filtro di carta
Motore pompa
Dimensioni:
Lunghezza
Larghezza
Altezza

120 l
40 l/min
500 mm
90 m
25 W

1200 mm
720 mm
660 mm



PFA-120

**PFA
PAPER FILTER**

FEATURES:

1. Applicable to both ferrous and non-ferrous particles.
2. Filter paper moves forward automatically when contaminants accumulate and clog it.
3. Filtration effect depends on paper accuracy. Choose from 50µ, 30µ and 15µ.
4. Not suitable for heavy machining for the sake of paper consumption. Use magnetic separator as pre-filter to reduce paper consumption.


Remark:

1. Standard accessory: one paper roll.
2. Special specification is available.

APPLICATION:

1. Surface Grinding Machine	5. Small Grinding Machine
2. Centerless Grinding Machine	6. Gear Grinding Machine
3. Internal/External Grinding machine	7. Planer
4. Heavy machine	

DIMENSION DIAGRAM

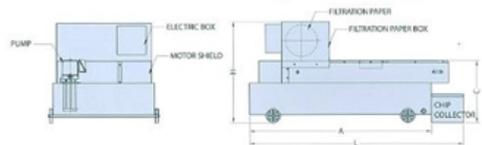

SPECIFICATION

MODEL	CAPACITY L/MIN	TANK VOL. (L)	L	A	B	C	H	H	PUMP (HP)	OUTLET	MOTOR	FILTER PAPER	WHEEL
PFA-20	20	100	1050	850	800	400	720	600	1/8	PP1/2"	25W		
PFA-40	40	120	1300	1050	800	400	720	600	1/8	PP1/2"	25W	W: 100MM	
PFA-60	60	140	1350	1150	800	400	720	600	1/8	PP1/2"	25W	L: 90M	
PFA-80	80	160	1500	1300	800	400	720	600	1/8	PP3/4"	25W		WHEEL
PFA-120	120	210	1900	1500	800	400	920	740	1/2	PP3/4"	40W	W: 100MM	
PFA-160	160	260	1900	1600	800	400	920	740	1/2	PP3/4"	40W	L: 90M	
PFA-240	240	440	1550	1350	1060	450	1330	740	1	PP1"	60W	W: 100MM	NO
PFA-300	300	640	2150	1950	1060	450	1330	740	1	PP1"	60W	L: 90M	WHEEL
PFA-500	500	960	3340	2950	1060	450	1330	740	1.5	PP1.5"	60W	L: 90M	WHEEL