

SAM 020039**HUAWIN Tipo HW 110**

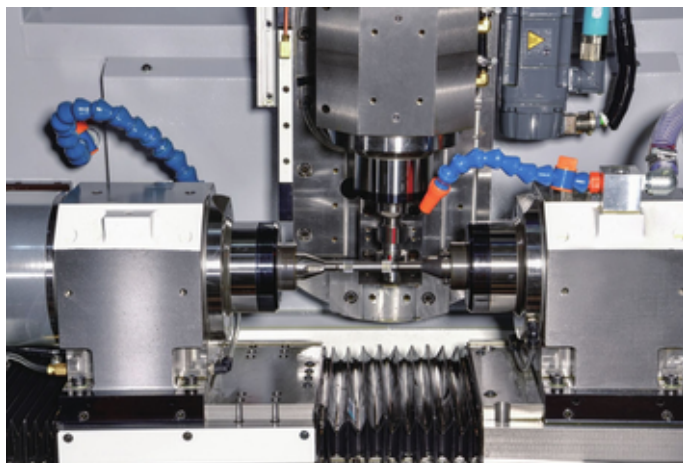
| | |
|----------------------|---|
| Gruppo | Dentatrice CNC |
| Produttori | HUAWIN |
| Tipo | HW 110 |
| Controller | HUAWIN (FANUC / SIEMENS optional) |
| Video youtube | https://www.youtube.com/shorts/h7A4TCsdFO0 |



| | |
|---------------------------------------|-------------|
| Campo di lavoro: diametro massimo | 60 mm |
| Modulo massimo | 1 / 1.5 |
| Numero di denti min. | 6 |
| massimo | 390 |
| Spostamento della fresa mass. | 60 mm |
| Giri della fresa: | |
| da | 300 t/min |
| fino | 3000 t/min |
| Angolo massimo della testa portafresa | +/- 45 ° |
| Avanzamenti: | |
| assiale da | mm/min |
| fino | 1000 mm/min |
| radiale da | mm/min |
| fino | 1000 mm/min |
| Potenza | 0.75 kW |
| Peso della macchina circa | 1250 kg |
| Dimensioni macchina: | |
| Lunghezza | 1800 mm |
| Larghezza | 1730 mm |
| Altezza | 2300 mm |

Accessori diversi:

Set di ingranaggi
 Lampada
 Refrigerazione

www.mullermachines.ch

Workpiece

**Gear Hobbing Machine
HW110**
Specification

| No. | Item | Spec. | Unit |
|-----|----------------------------|--------------------|--------|
| 1 | Max. gear outside diameter | 60 | mm |
| 2 | Max. Module | 1.5 | M |
| 3 | Max. size of hob | Φ38L50 | mm |
| 4 | Max. spindle rotation | 10,000 | rpm |
| 5 | Shifting | 70 | mm |
| 6 | A-axis swivel angle | ±30° | Degree |
| 7 | C-axis Max. speed | 6,000 | rpm |
| 8 | X-axis radial travel | 80 | mm |
| 9 | Z-axis axial travel | 90 | mm |
| 10 | Z2 tailstock travel | 110 | mm |
| 11 | Power capacity | 50 | KVA |
| 12 | Air pressure source | 4 | bar |
| 13 | Machine size | 1950 x 1250 x 2000 | mm |
| 14 | Net weight | 2500 | kgf |