



Inventory number: 22807

CNC automatic lathe  
CITIZEN CINCOM M 20




### Technical data

Max. turning diameter	20 mm
Turning length	320 mm
Max. drilling diameter	10 mm
Max. threading diameter	8 M (Metric)
Internal spindle diameter	24 mm
Spindle speeds:	
stepless	
from	200 rpm
up to	10000 rpm
Turret slide:	
Number of positions	10
Back spindle:	
speeds:	
from	200 rpm
up to	5000 rpm
Tool-holder:	
numbers	2
number of driven tools	3
Turning tools	5 pce
Rapid traverse X	20 m/min
Rapid traverse Y	20 m/min
Voltage 50 Hz 3x	400 Volt
Spindle motor	3.7 / 7.5 kW
Power of back spindle	1.5 / 3.7 kW
Power of driven tools	1.5 / 2.2 kW
Total power required	8 kVA

Machine's weight about	2500 kg
Overall dimensions machine:	
Length	2800 mm
Width	1370 mm
Height	1800 mm
Various accessories:	
Process controlling device	NORDMANN
Driven tool holder radial (nbr.)	3
Bar feeder	
Manufacturer	LNS
Type	HYDROBAR EXPRESS 226
year of manufacture	1999
Length of bars max.	3200 mm
Bar diameter	2 - 26 mm
Lamp	
Chip conveyor	
Fire extinguishing system	
Status light	



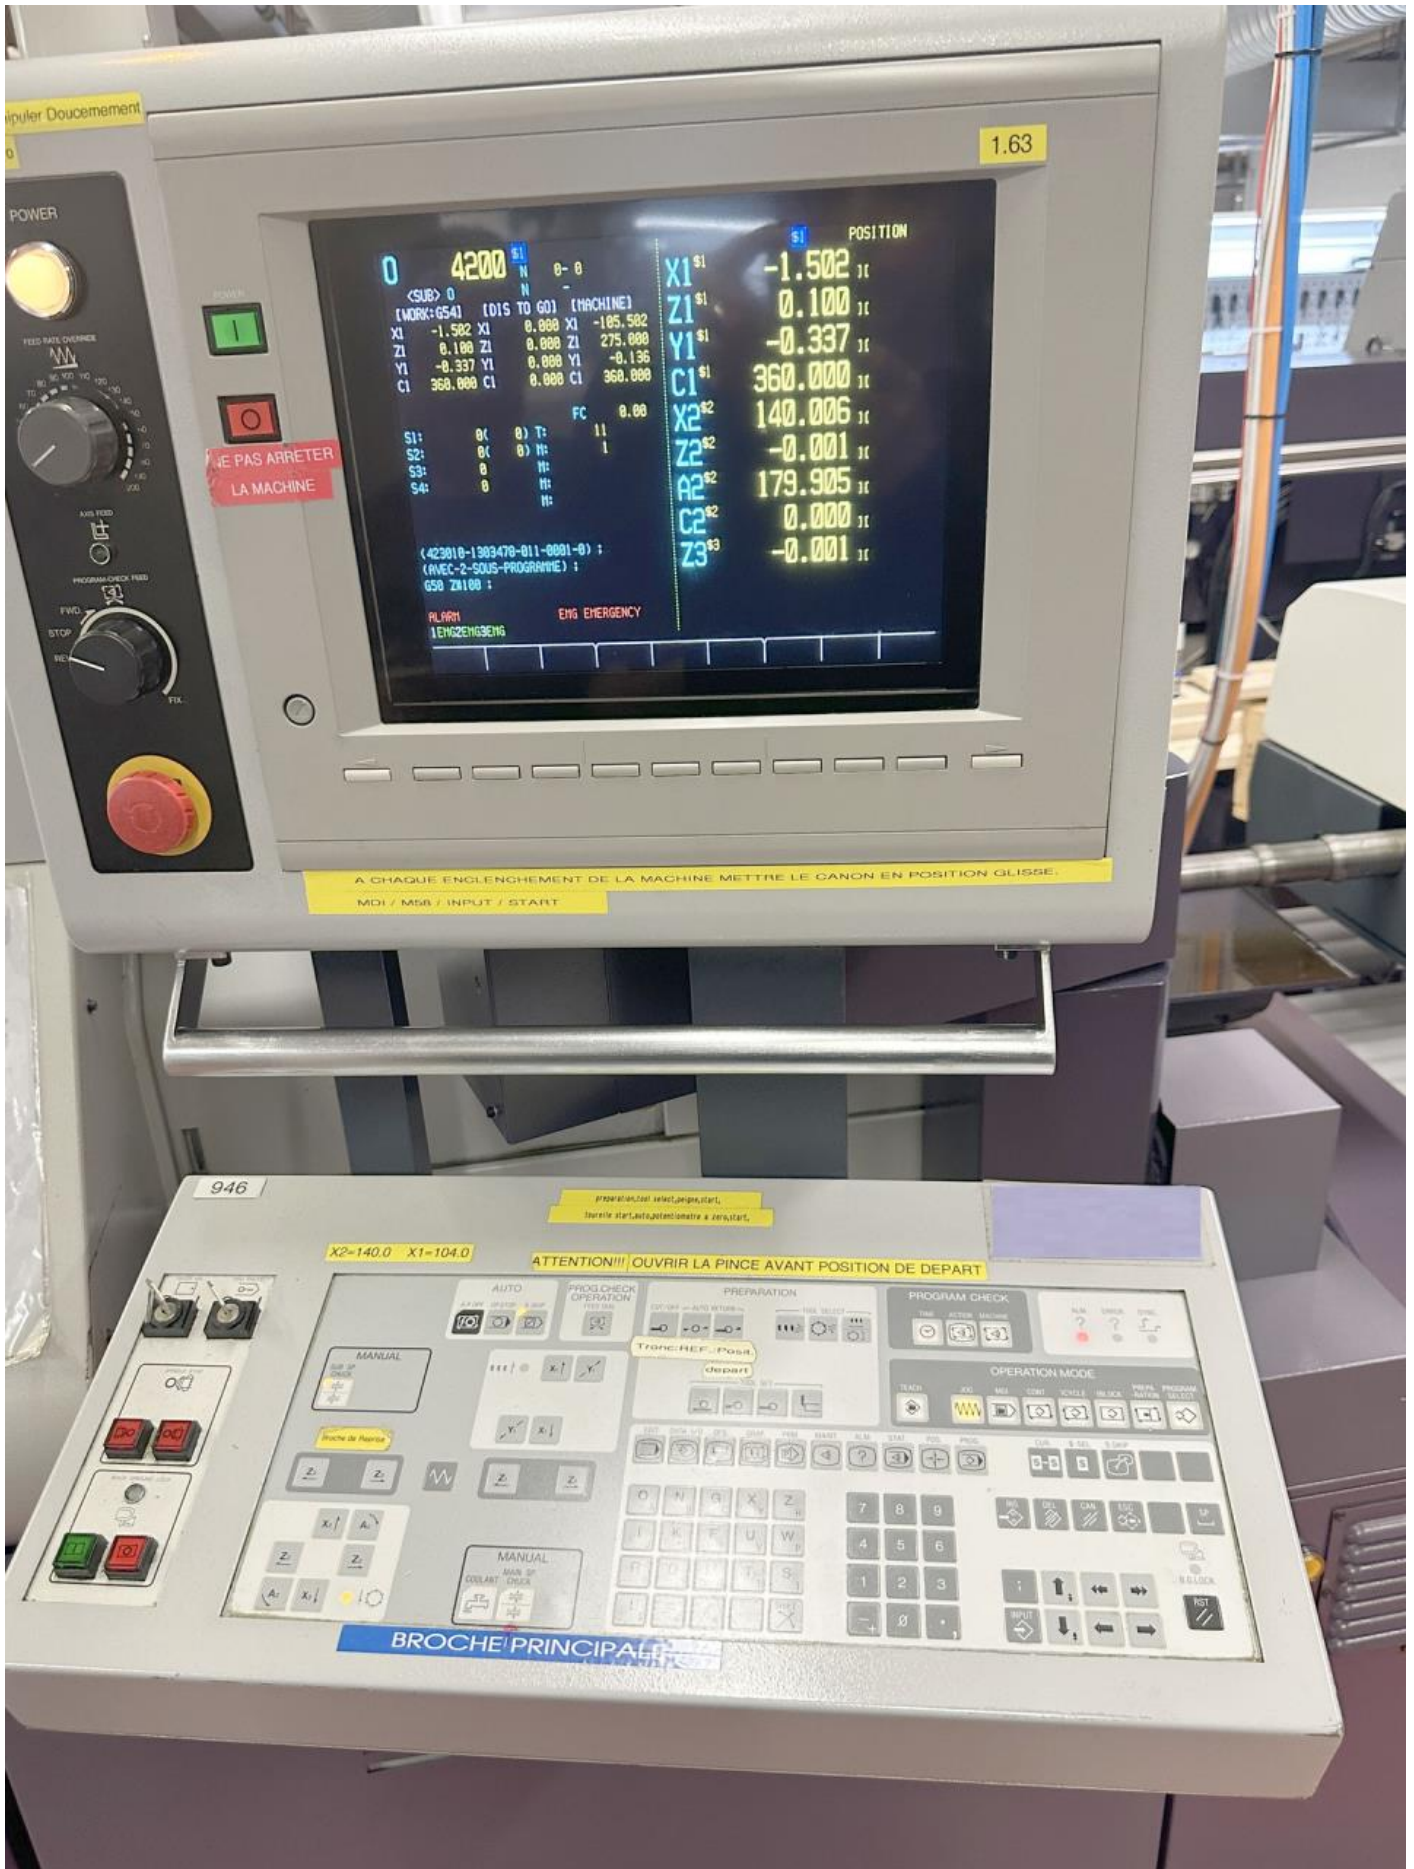

METER  
NE

0 4200 \$1 N 0-0  
<SUB> 0 N -  
[WORK: 654] [DIS TO GO] [MACHINE]  
X1 -1.502 X1 0.000 X1 -105.502  
Z1 0.100 Z1 0.000 Z1 275.000  
Y1 -0.337 Y1 0.000 Y1 -0.136  
C1 360.000 C1 0.000 C1 360.000  
FC 0.00  
S1: 0( 0) T: 11  
S2: 0( 0) H: 1  
S3: 0 H:  
S4: 0 H:  
(423010-1303478-011-0001-0) ;  
(AVEC-2-SOUS-PROGRAMME) ;  
G50 Z#100 ;  
ALARM ENG2ENG3ENG  
ENG EMERGENCY

	\$1	POSITION
X1	\$1	-1.502 JI
Z1	\$1	0.100 JI
Y1	\$1	-0.337 JI
C1	\$1	360.000 JI
X2	\$2	140.006 JI
Z2	\$2	-0.001 JI
A2	\$2	179.905 JI
C2	\$2	0.000 JI
Z3	\$3	-0.001 JI





