

SAM 021633**KELLENBERGER Type 600 U**

Group Cylindrical grinder
Manufacturer KELLENBERGER
Type 600 U




Centre height	125 (175) mm
Distance between centres	600 mm
Max. Longitudinal travel	900 mm
Max. transversal travel	245 mm
Grinding wheel:	
Diameter	400 mm
Width	50 mm
Bore	127 mm
Grinding wheel speeds:	
number (steps)	3
from	1500 t/min
up to	2200 t/min
Angular displacement	270 °
Work piece spindle head:	
speeds:	
stepless	
from	20 t/min
up to	400 t/min
rotatable	360 °
Spindle taper	5 CM
Taper in tailstock:	3 CM
Table angular displacement	10 °
Table speed:	
stepless	
from	m/min
up to	6 m/min
Voltage 50 Hz 3x	380 Volt
External Grinding wheel motor	4 CV
Total power required	6 kW
Machine's weight about	2'200 kg
Overall dimensions machine:	
Length	3000 mm
Width	1750 mm
Height	1600 mm
Various accessories:	
Internal grinding attachment	
Spindle speeds	14000 t/min
Flange for outer pane	1 pce
Two-jaw steady rest	
Collet-chuck attachment	W20

www.mullermachines.ch

Grinding wheel guard
Safety device
Sliding door



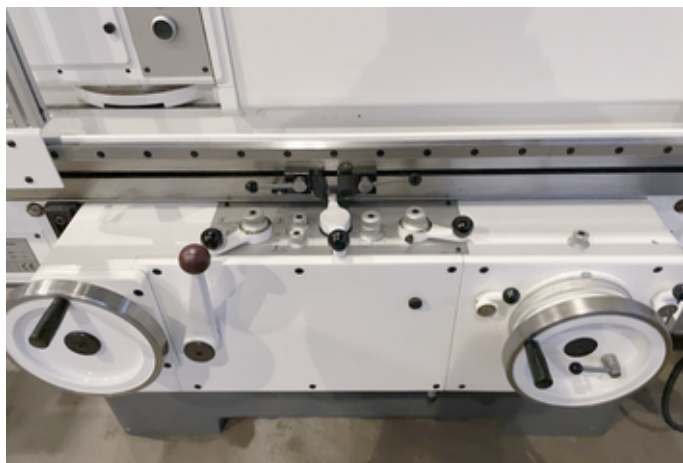

www.mullermachines.ch

