

SAM 023756**FANUC Type ROBOSHOT ALPHA-S50 iB**


Groupe	Presse d'injection
Fabricant	FANUC
Type	ROBOSHOT ALPHA-S50 iB
Commande	FANUC PANEL iH Pro
Année	2022




Force de verrouillage	50 to
Capacité de moulage env.	19 - 76 cm ³
Course de l'éjecteur	70 mm
Force de l'éjecteur	20 kN
Poids de l'outil max.	300 kg
Pression sur la matière	3600 bar
Diamètre de la vis	14 - 32 mm
Coup de vis	95 mm
Vitesses de la vis: Nombre à	450 t/min
Course de l'ouverture	250 mm
Surface des plateaux:	
Longueur	500 mm
Largeur	470 mm
Passage entre colonnes:	
horizontal / avant	360 mm
Verticale	320 mm
Branchement 50 Hz 3x	400 Volt
Poids de la machine env.	2900 kg
Encombrement machine:	
Longueur	3700 mm
Largeur	1100 mm
Hauteur	1500 mm

Accessoires divers:

Transformateur
Lampe de statut

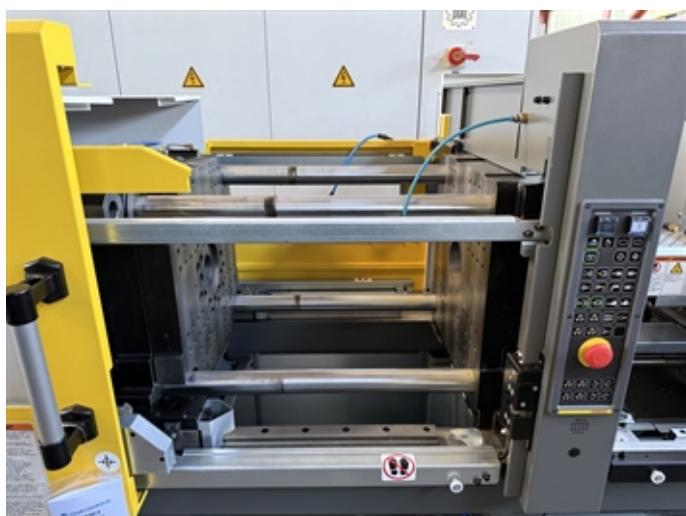

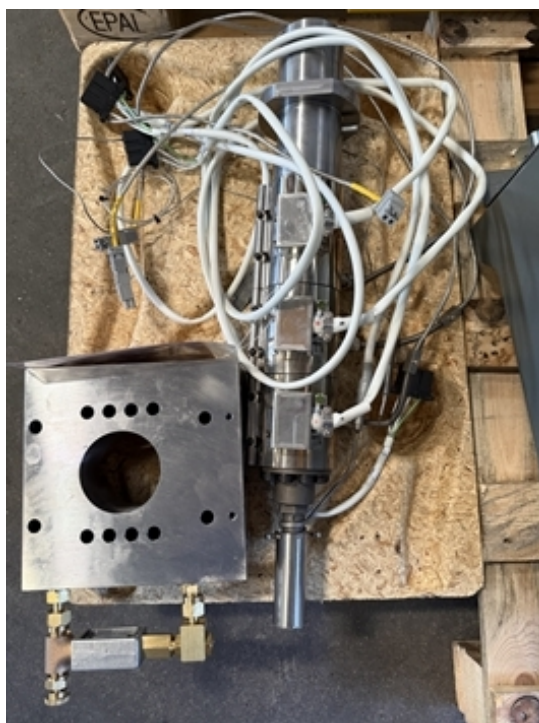

www.mullermachines.ch

Pos.	Specification	Description	QTY
1 Configuration reference: GRJH10N0708			
1.1	S50IB/350	FANUC ROBOSHOT S50IB	1
1.2	LX-C-RS-LL-34-1-1406	Caution Plate - Retrofit kit S50IB French	1
1.3	LX-C-RS-SB-15-1-0181	14mm W/C Barrel, 2-pc Long Nozzle, for SiB	1
1.4	A290-S500-T495#14CT	Nozzle 14mm, J type, 2Pcs, Middle Long, R10, 2.5mm	1
1.5	A290-S514-VY71#1550	Heat Cover Standard 14mm	1
1.6	LX80L-0015-2001	TRANSFORMER 20 KVA / IP23 RAL7016 - ROBOSHOT	1
1.7	A07B-0523-J006#3LA	Signal tower (lighting and blinking switched) [red,yellow,green] (LED)	1
1.8	A07B-0523-J273#EU6773	Robot Interface and Rear (Safety) Gate Interface - EUROMAP-67/-73 Cable Kit (Option)	1
1.9	B-69804FR	Operator's Manual (French)	1
1.10	B-69805FR	Maintenance Manual (French)	1
1.11	A07B-0008-J869#A	VNC Function	1
1.12	A07B-0008-J898	EUROMAP 82,1	1