

SAM 019561**DMG Type DMU 60 P hy-din**

Group	5-axis machining center
Manufacturer	DMG
Type	DMU 60 P hy-din
Controller CNC	HEIDENHAIN MillPlus /3R-WorkMaster +3R-WorkShopManager
Year	2001



Number of axis simultaneous	5
Number of tables	1
Number of spindles	1
Circular table diameter	630 mm
Number of T-channels	9
Distance of the T-slots	63 mm
T-channel width	14H7 mm
Centering bore diameter	50H6 mm
Longitudinal travel (X-axis)	600 mm
Transversal travel (y-axis)	700 mm
Vertical travel (z axis)	600 mm
Dimension of the workpiece:	
Height	1000 mm
Diameter	920 mm
Table load max.	500 kg
Table divisions (B)	360 °
A axis	
Swivel angle (a-axis)	+45/-30 °
Holding torque A-axis	3866 Nm
Clamping torque C-axis	6'008 Nm
Torque max.	2650 Nm
Tool changer:	
Number of tools	180
Tool diameter	80 mm
Diameter with free adjacent pockets	160 mm
Tool lenght	350 mm
Max. tool-weight	10 kg
Spindle nose	SK
Spindle speeds:	40 DIN 69871
stepless	
up to	18000 t/min
Feeds:	
stepless	
longitudinal from	20 mm/min
up to	15000 mm/min
transversal from	20 mm/min
up to	15000 mm/min
vertical from	20 mm/min
up to	15000 mm/min
Rapid traverse:	40 m/min



www.mullermachines.ch

Measurement system:

Resolution

µm

Air connect

5 - 8 bar

Voltage 50 Hz 3x

400 Volt

Total power required

44 kVA

Noise level

80 dB (A)

Machine's weight about

7500 kg

Overall dimensions machine:

Length

7500 mm

Width

4500 mm

Height

2628 mm

Various accessories:

Set of toolholders

SK 40 ca 150x

High pressure coolant device

40 bar

Coolant through spindle (cts)

Tool setter Renishaw

Lamp

Rotating viewing window

Switch cabinet Air conditioner










www.mullermachines.ch

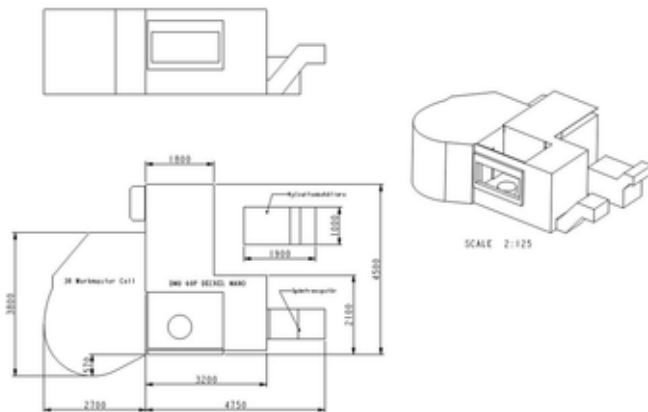

Technical data and photographs without warranty.

Industriestrasse 22
CH-2555 Brugg BE / Switzerland

T +41 32 373 34 44

sales@mullermachines.ch
CHE-108.090.645 MWST