



SAM 020885**HUAWIN Type WM 1560**

Groupe	Fraiseuse à vis hélicoïdale
Fabricant	HUAWIN
Type	WM 1560
Commande	SIEMENS
Video youtube	https://youtu.be/wrwOEH0PCMQ



Diamètre max.	150 mm
Longueur max. de la pièce	600 mm
Module max.	5 mm
Diamètre de la fraise	100 - 135 mm
Alésage	25.4 / 31.75 mm
Nombre tours de broche	360 t/min
Entraînement de la broche	4 kW
Courses:	
Axe X	150 mm
Axe Y	100 mm
Axe Z	600 mm
Axe A	+90 / -35 °
Tours poupée porte-pièce	10 t/min
Couple maximum	1200 Nm
Branchement à l'air comprimé	5 bar
Puissance totale installée	20 kVA
Poids de la machine env.	5000 kg
Encombrement machine:	
Longueur	2250 mm
Hauteur	1700 mm
Largeur	2280 mm

www.mullermachines.ch

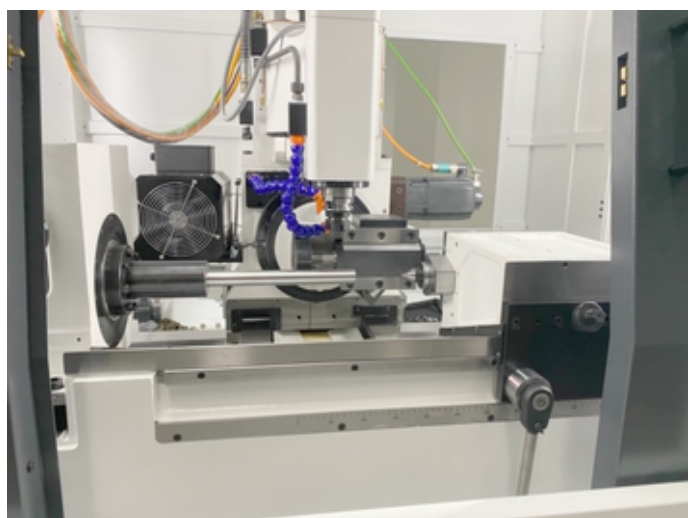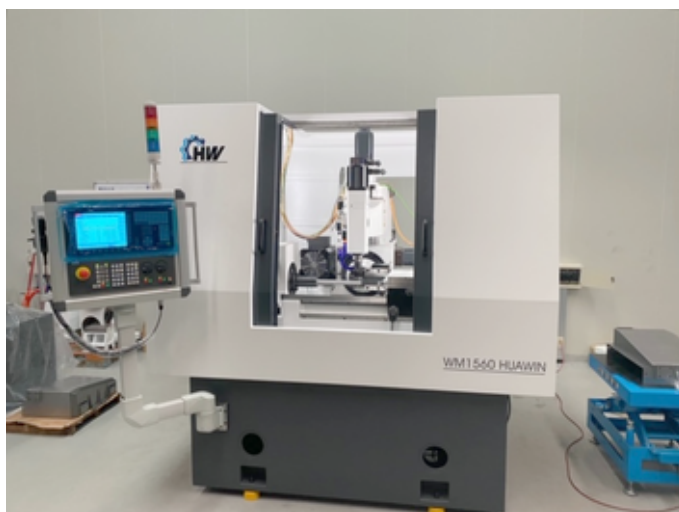

HUAWIN PRECISION LTD.

Worm Milling Machine

WM1560

Worm Milling Machine

- Milling teeth, chamfering, spline shaft, keyway, and double lead processing are completed at one time.
- A full-cover machine and cutting fluid backflow system facilitates daily maintenance and meet worming processing requirement.



www.mullermachines.ch
HUAWIN PRECISION LTD.
Worm Milling Machine
WM1560
Machine Specifications

Workpiece	Spec	Unit
Max. Module	5 (8) ^{※1}	mm
Max. Diameter	150	mm
Max. workpiece length	600	
Hob		
Max. hob diameter	100-135	mm
Hob aperture	25.4, 31.75	mm
X-axis travel	150	mm
Y-axis travel	100	mm
Z-axis travel	600	mm
A axis angle	+90 -35	degrees
C-axis		
Rated torque	1200	N.m
Max. speed	10	r/min
Chucks	Three-claw hydraulic chuck	
B-axis		
Power	3.8	Kw
Max. speed	360	r/min
Power capacity	20	KVA
Air pressure source		
Rated flow	30	L/min
Pressure	0.5	Mpa
Floor space	L2250×W1700×H2280	mm
Net weight	5000	kgs

※1 Special specifications