


**SAM 020885****HUAWIN Tipo WM 1560**

<b>Gruppo</b>	Fresatrice a vite elicoidale
<b>Produttori</b>	HUAWIN
<b>Tipo</b>	WM 1560
<b>Controller</b>	SIEMENS



diametro massimo	150 mm
Distanza massima	600 mm
Modul massimo	5 mm
Diametro di fresa	100 - 135 mm
Alesaggio	25.4 / 31.75 mm
Giri mandrino	360 t/min
Guidare mandrino di fresatura	4 kW
Corse:	
Asse X	150 mm
Asse Y	100 mm
Asse Z	600 mm
Asse A	+90 / -35 °
Velocità rotazione del pezzo	10 t/min
Momento torcente mass.	1200 Nm
Collegamento aria compressa	5 bar
Potenza installata totale	20 kVA
Peso della macchina circa	5000 kg
Dimensioni macchina:	
Lunghezza	2250 mm
Altezza	1700 mm
Larghezza	2280 mm

[www.mullermachines.ch](http://www.mullermachines.ch)

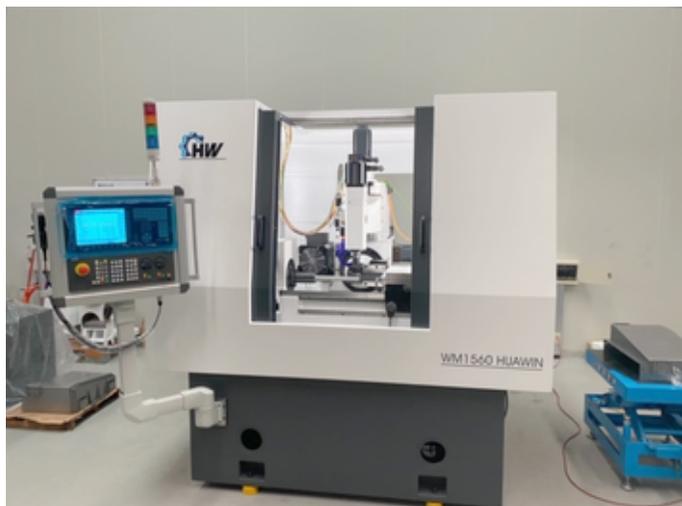


HUAWIN PRECISION LTD.

Worm Milling Machine

**WM1560**

### Worm Milling Machine

- Milling teeth, chamfering, spline shaft, keyway, and double lead processing are completed at one time.
- A full-cover machine and cutting fluid backflow system facilitates daily maintenance and meet worming processing requirement.

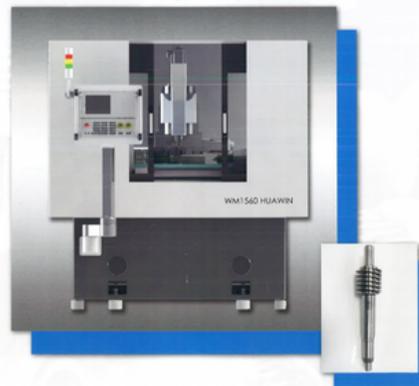

[www.mullermachines.ch](http://www.mullermachines.ch)
**HUAWIN PRECISION LTD.**
*Worm Milling Machine*
**WM1560**
**Machine Specifications**

Workpiece	Spec	Unit
Max. Module	5 (8) <sup>*1</sup>	mm
Max. Diameter	150	mm
Max. workpiece length	600	
Hob		
Max. hob diameter	100-135	mm
Hob aperture	25.4, 31.75	mm
X-axis travel	150	mm
Y-axis travel	100	mm
Z-axis travel	600	mm
A axis angle	+90 -35	degrees
C-axis	Rated torque	1200 N.m
	Max. speed	10 r/min
	Chucks	Three-claw hydraulic chuck
B-axis	Power	3.8 Kw
	Max. speed	360 r/min
Power capacity	20	KVA
Air pressure source	Rated flow	30 L/min
	Pressure	0.5 Mpa
Floor space	L2250×W1700×H2280	mm
Net weight	5000	kgs

※ 1 Special specifications