


SAM 021338**HUAWIN Tipo EG 1260**

Gruppo	Rettificatrice esterno a scanalatura
Produttori	HUAWIN
Tipo	EG 1260
Video youtube	https://youtu.be/ATw5twUp5Xw



Diametro della scanalatura min.	20 mm
Diametro della scanalatura max.	120 mm
Larghezza della scanalatura min.	4 mm
Larghezza della scanalatura max.	20 mm
Numero di scanalature	1 - 99
Corse:	
Asse X	70 mm
Asse Y	150 mm
Asse Z	600 mm
Asse U	40 mm
Motore mandrino	8 kW
Giri massimo	10000 t/min
Momento torcente mass.	500 Nm
Collegamento aria compressa	5 bar
Potenza installata totale	20 kVA
Peso della macchina circa	4500 kg
Dimensioni macchina:	
Lunghezza	2200 mm
Larghezza	1650 mm
Altezza	2000 mm

www.mullermachines.ch

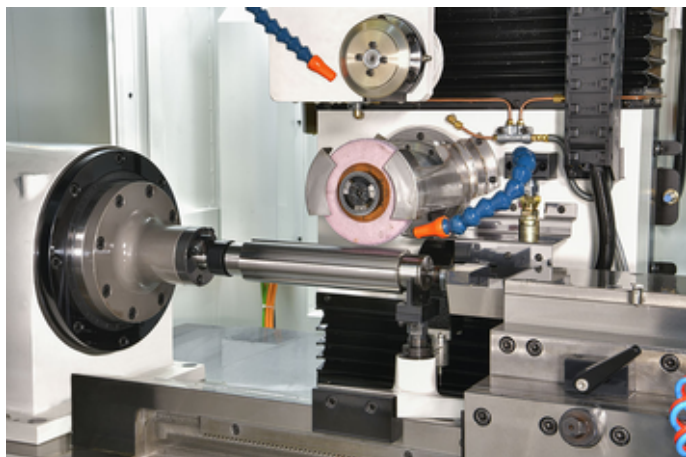

HUIAWIN PRECISION LTD.
External Spline Grinder **EG1260**

External Spline Grinder EG1260

- Equipped with interactive HM for upgraded performance and user-friendly operators.
- Quick dressing process realized by moveable rotary dressing device.
- DD motor of C-axis with zero-backspace last.
- High precision applied to detect workpiece automatically.



option option




HUIAWIN PRECISION LTD.
External Spline Grinder **EG1260**

EG1260 External Spline Grinder

Machine Specifications		Value	Unit	Remark
General				
Min. spline minor diameter	40.00	mm		
Min. spline width	4	mm		
Max. spline major diameter	120	mm		
Max. spline width	20	mm		
Number of spline	1-99			
Grinder				
A-axis	575	mm		
B-axis	1100	mm		
C-axis	40	mm		
D-axis	2000	mm		
Y	Rated torque	1000	N.m	
	Rated distance	300	mm	
Z	Motor	7.5	kW	
	Max. speed	10000	rpm	
X	Motor capacity	1.25	kW	
	Motor	30	mm	
U	Motor	0.5	kW	
	Motor	10	mm	
V	Motor	0.5	kW	
	Motor	10	mm	
W	Motor	0.5	kW	
	Motor	10	mm	
X	Motor	0.5	kW	
	Motor	10	mm	

B: S1-axis
 C: C-axis
 X: Feeding-axis
 Y: Feeding-axis
 Z: Feeding-axis
 U: Rotary dressing device

HUIAWIN PRECISION LTD.
 3113 維多利亞大道二樓202號
 Unit 202, No. 3113, Victoria Avenue, Tuen Mun, New Territories
 Tel: +852 2424 8828 Fax: +852 2424 8748
 No. 1000, Industriestrasse, CH-2555 Brugg, Switzerland
 Email: sales@mullermachines.ch
 www.mullermachines.ch

B : S1-axis
 C : C-axis
 X : Feeding- axis
 Y : Feeding-axis
 Z : Feeding-axis
 U : Rotary dressing device

www.mullermachines.ch

