



Inventarnummer: 12390

### Mehrspindeldrehautomat SCHÜTTE SF 26




### Technische Daten


Anzahl Spindeln	6
Durchlass Rundmaterial	26 mm
Grösster Stangenvorschub	80 mm
Grösste Drehlänge	39.6 mm
Grösster Längsschlittenhub	63 / 39.6 mm
Anzahl der möglichen Stückzeiten	31
Stückzeit innerhalb:	
von	0.36 Sekunden
bis	95 Sekunden
Spindeldrehzahlen:	
von	355 U/min
bis	5000 U/min
Anschluss 50 Hz 3x	380 Volt
Leistung	15 kW
Maschinengewicht ca.	4000 kg
Abmessungen Maschine:	
Länge	3125 mm
Breite	1030 mm
Höhe	2000 mm
Diverses Zubehör:	
Stangenführung	
Längsschlitten Anzahl	2
Werkzeugbruchkontrolle	
Rückseitenbearbeitung	





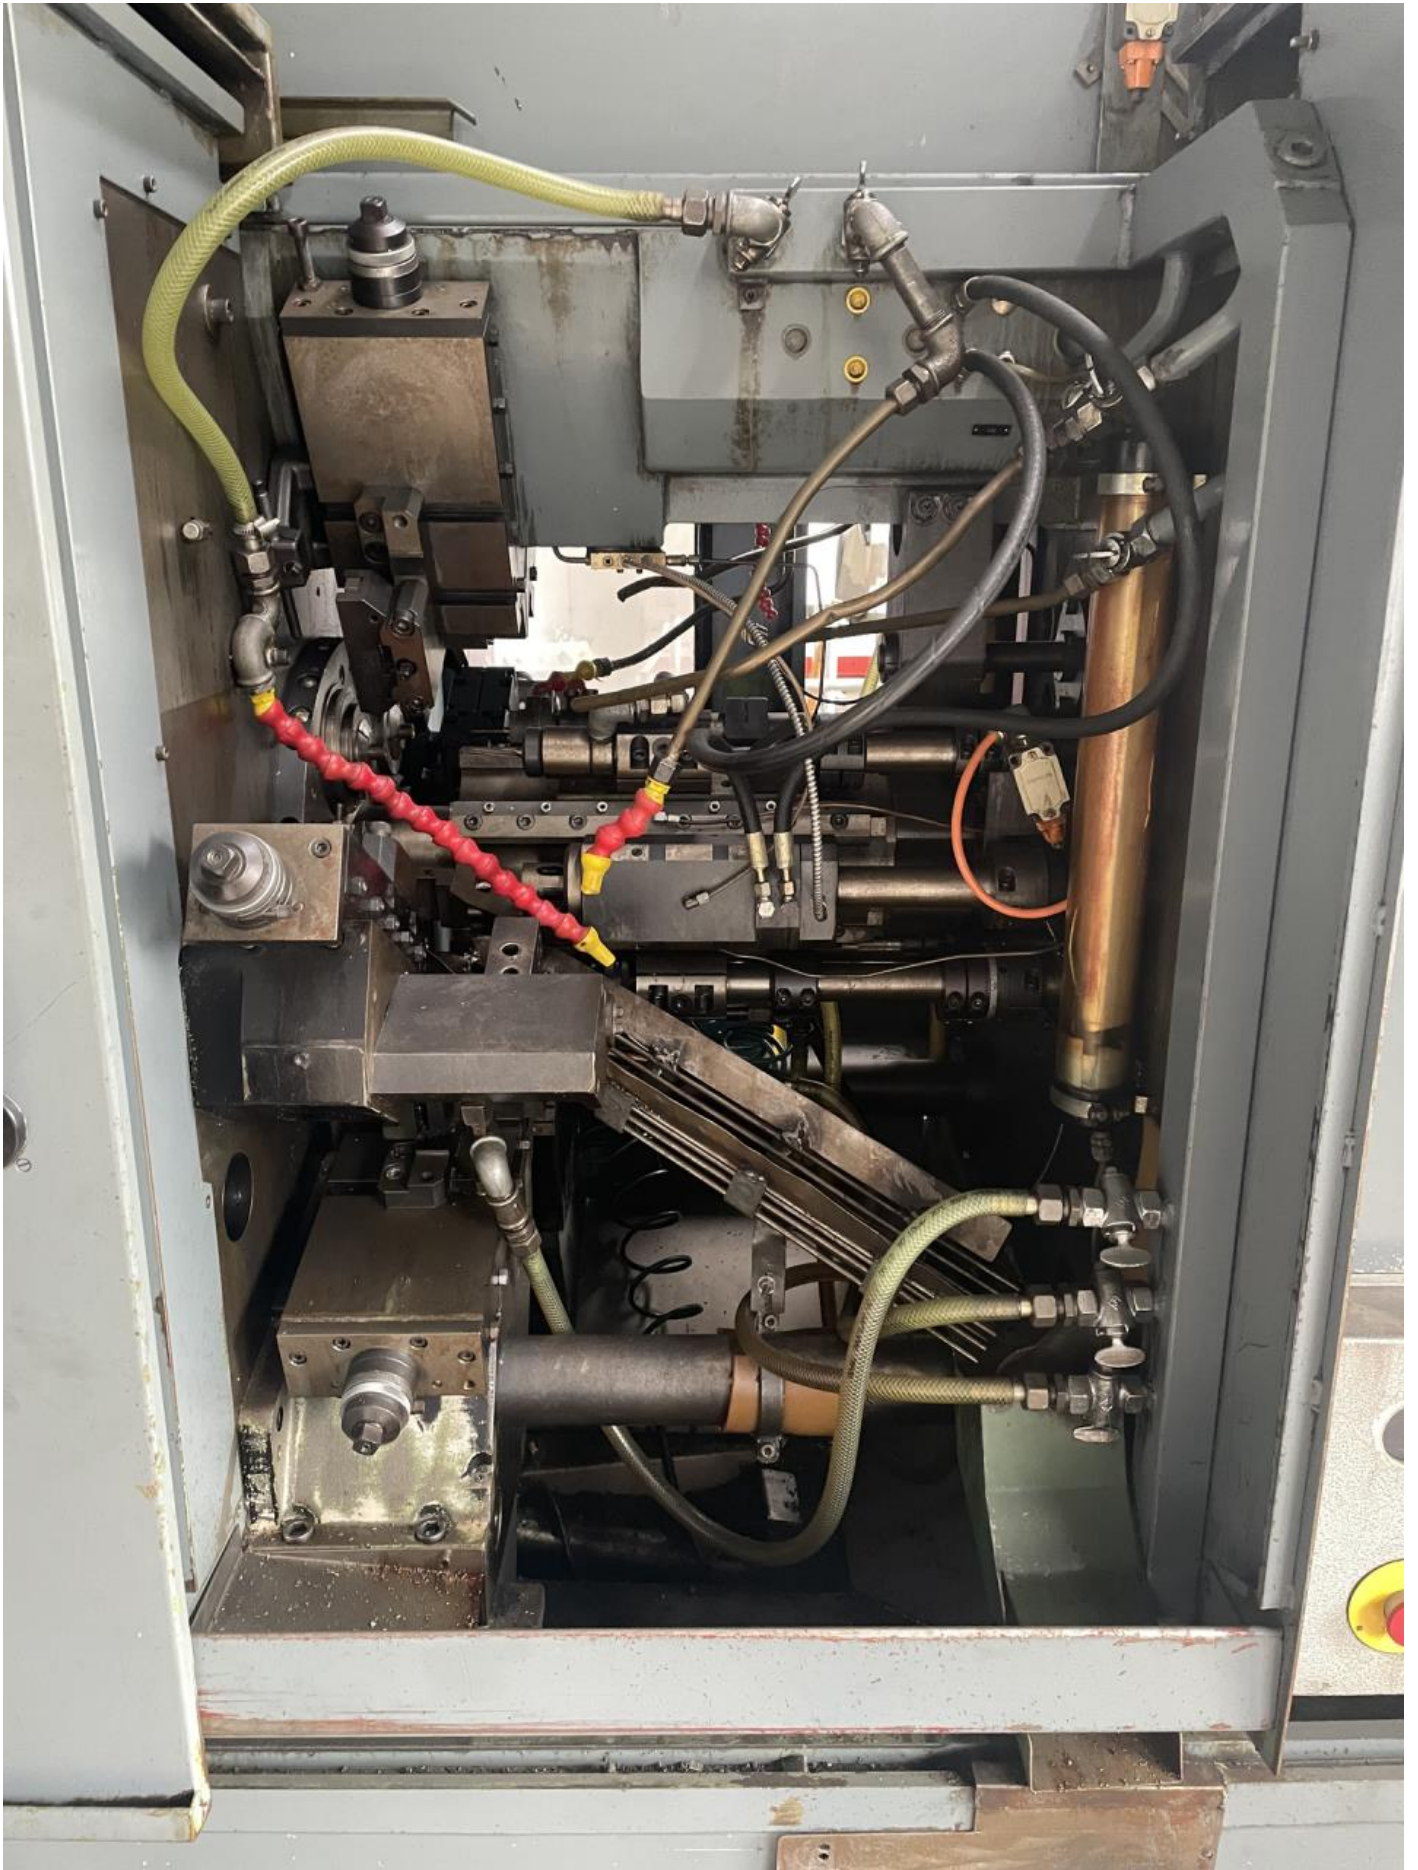




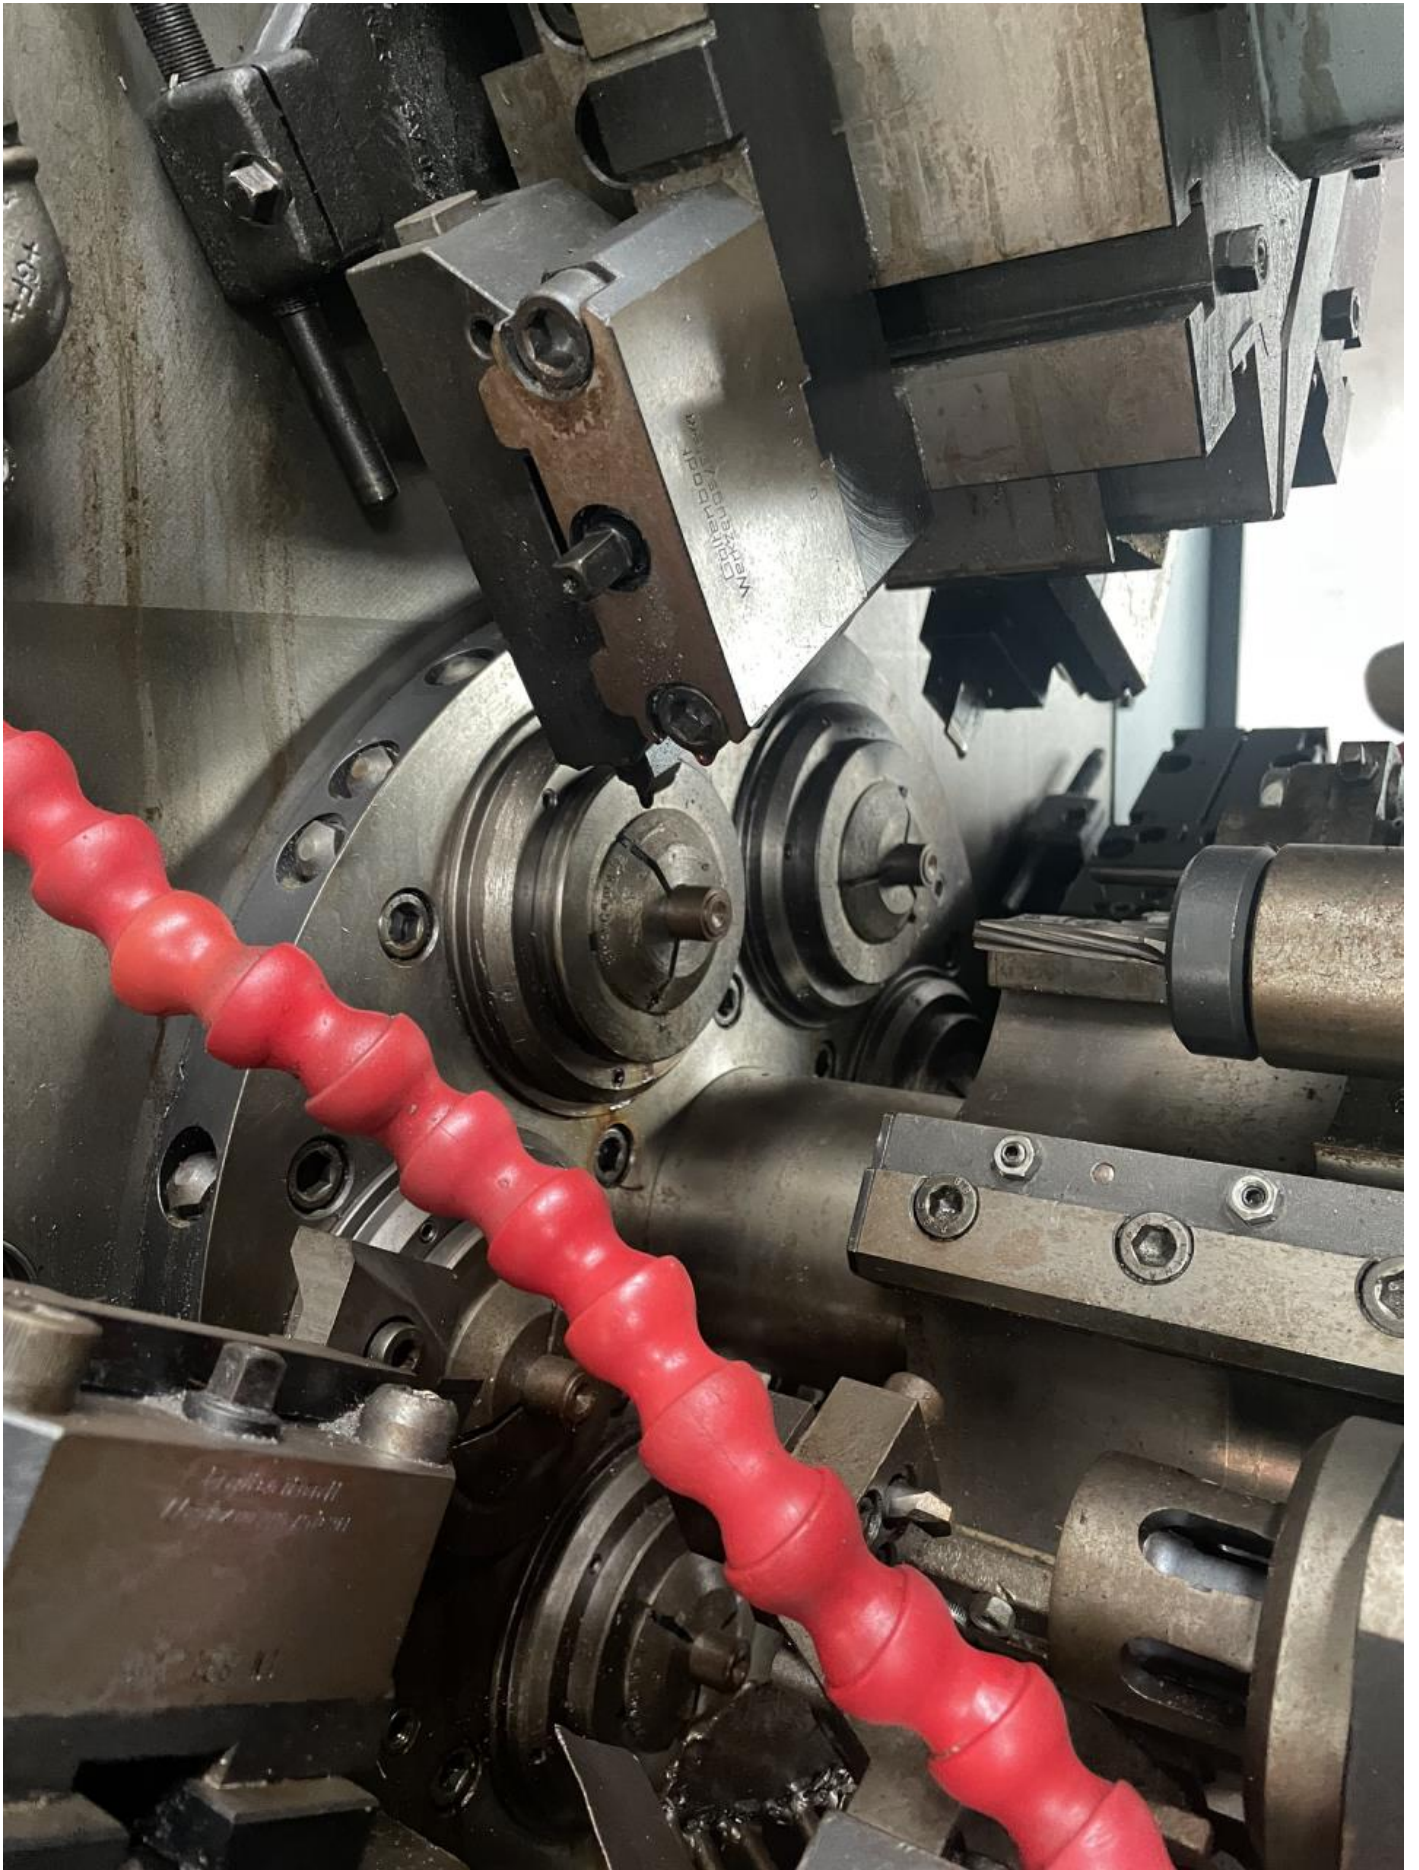







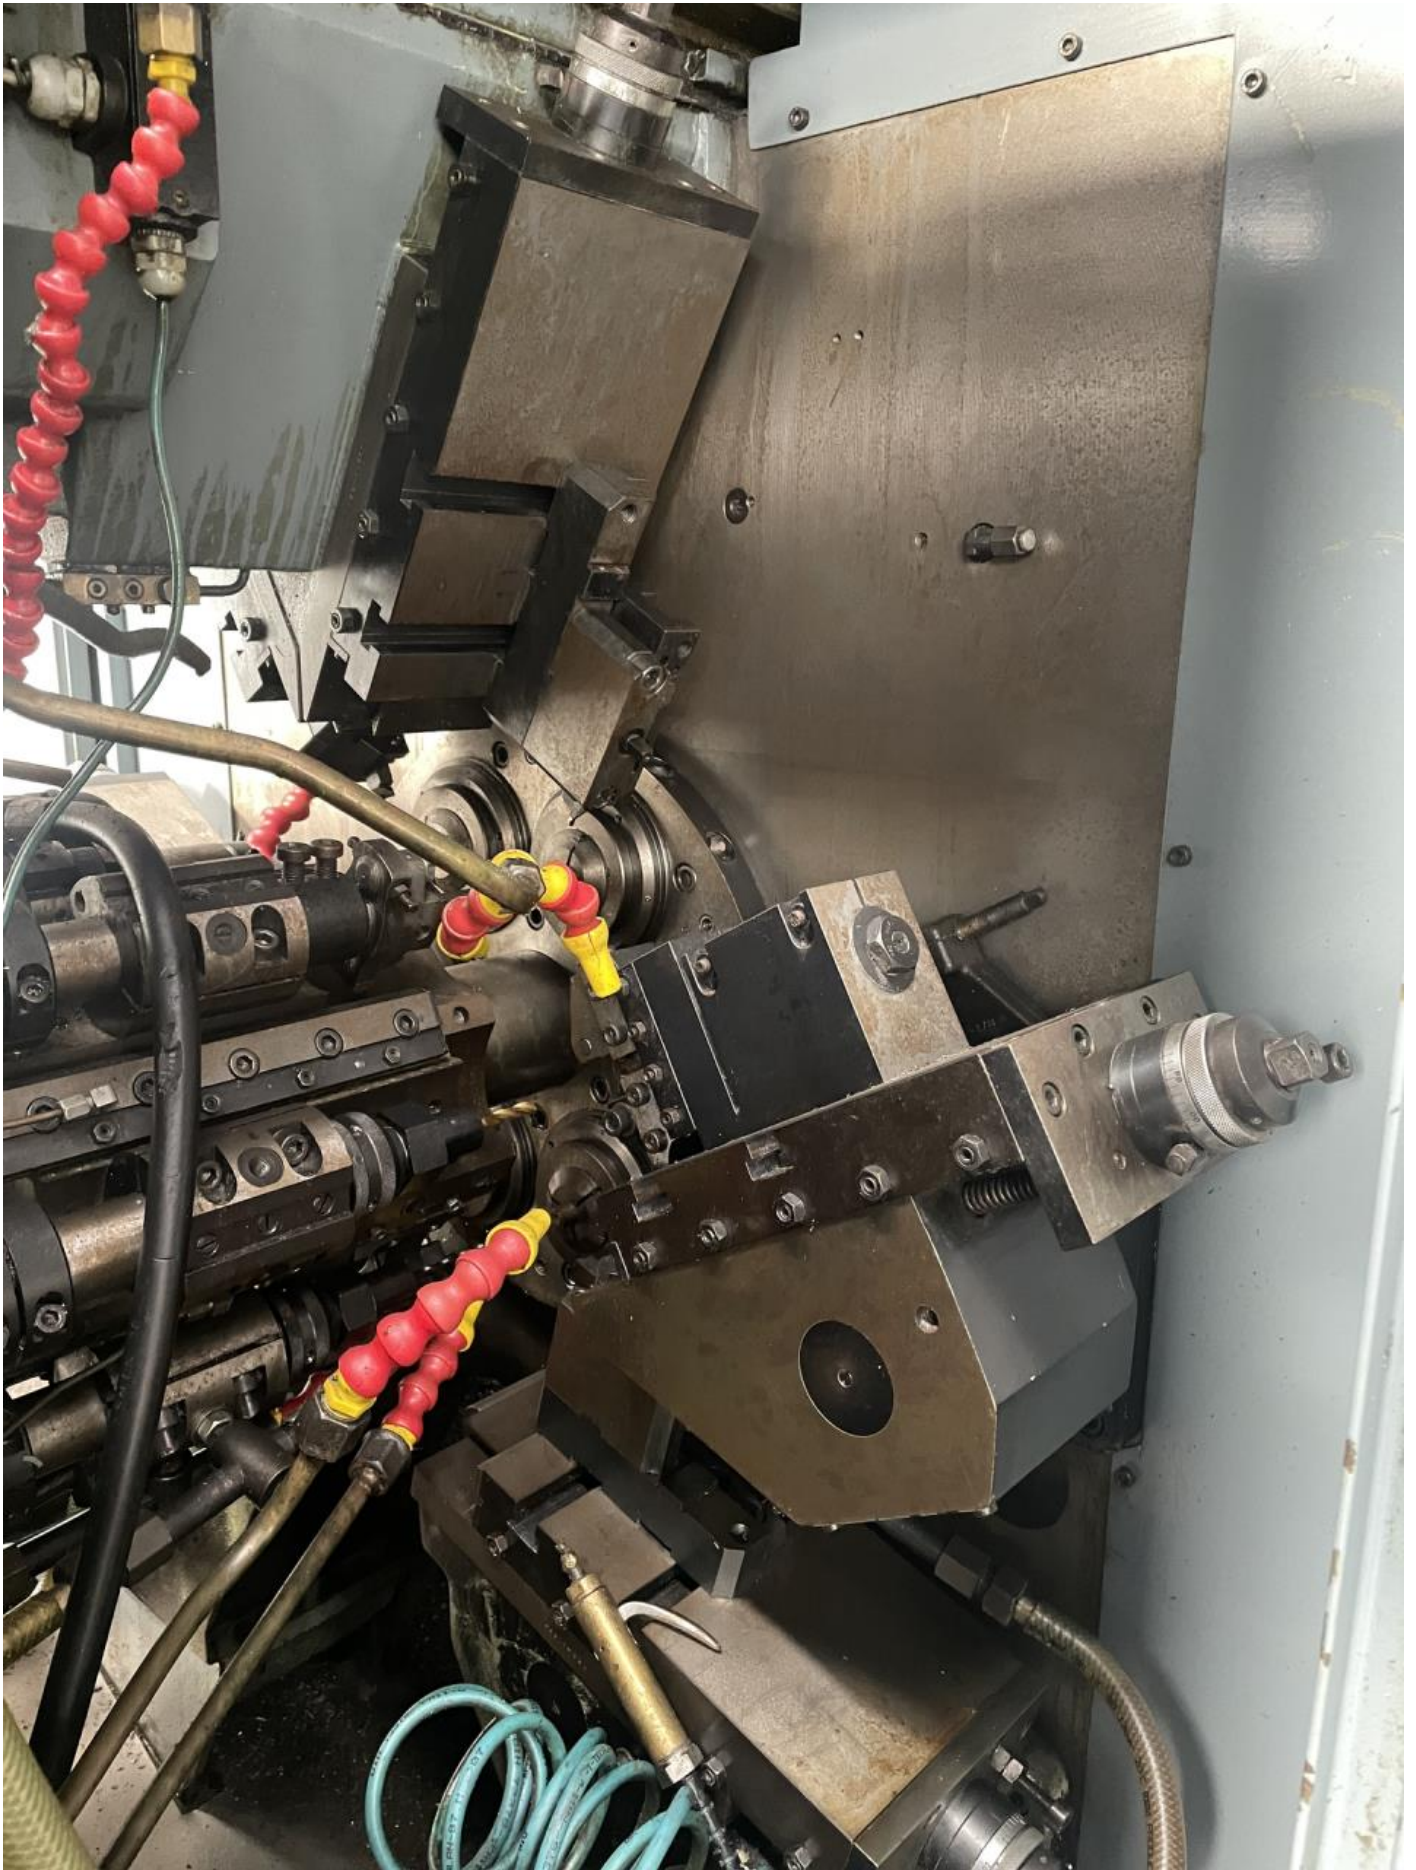



Control panel for BRANKAMP Widatronic 8060. The panel features a large rectangular display screen at the top. Below the screen is a control interface divided into three main sections: LIMITS, INPUT, and OPERATION.

- LIMITS:** Includes a home button, buttons for C1, C2, C3, C4, a LIMIT SET button, and MENU I / MENU II buttons.
- INPUT:** A numeric keypad with buttons for 0-9 and an ENTER button.
- OPERATION:** Includes a RESET button, AUTO, SET UP, and MEMORY buttons, and a rotary switch labeled OPERATE with SERVICE and SYSTEM positions.

At the bottom of the panel, the BRANKAMP logo and the model name "Widatronic 8060" are printed.









