




Inventory number: 21941

Universal milling machine
SCHAUBLIN 13

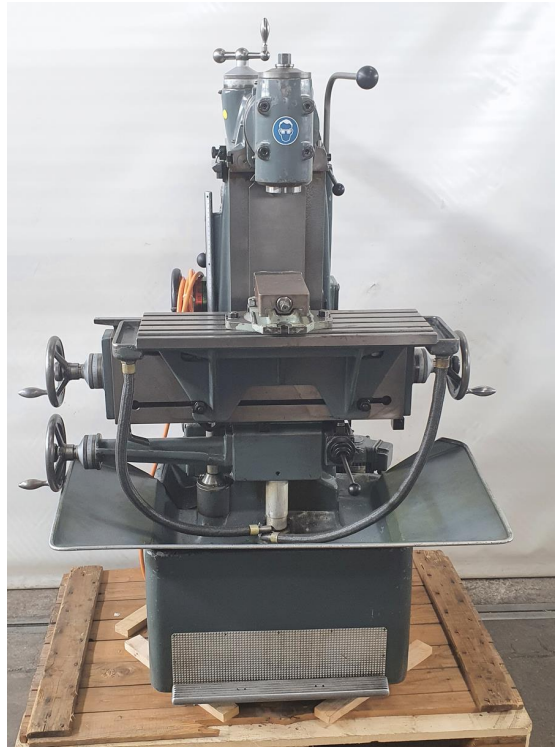

Technical data

| | |
|---|-------------|
| Table length | 600 mm |
| Table width | 210 mm |
| Number of T-channels | 4 |
| T-channel width | 12 mm |
| Distance of the T-slots | 40 mm |
| Longitudinal travel (X-axis) | 260 mm |
| Transversal travel (y axis) | 150 mm |
| Vertical travel (z axis) | 310 mm |
| Travel of the upper slide | mm |
| Distance from vertical spindle to table | 310 mm |
| Distance from horizontal spindle to table | 410 mm |
| Spindle speeds: | |
| stepless | |
| from | 58 rpm |
| up to | 2000 rpm |
| Taper in spindle | 30 ISO |
| Feeds steps: | 10 |
| Feeds stepless: | |
| longitudinal from | 12.0 mm/min |

| | |
|-----------------------------|-------------|
| up to | 400 mm/min |
| vertical from | 12.0 mm/min |
| up to | 400 mm/min |
| Rapid traverse: | |
| longitudinal | 1.2 m/min |
| vertical | 1.2 m/min |
| Voltage 50 Hz 3x | 380 Volt |
| Motor output | 2.0 HP |
| Total power required | 3.0 HP |
| Total power required | kVA |
| Machine's weight about | 700 kg |
| Overall dimensions machine: | |
| Length | 1500 mm |
| Width | 1100 mm |
| Height | 1600 mm |
| Various accessories: | |
| Vice | |
| Rigide table | |





